# 74ABT126

**Quad buffer; 3-state**Rev. 7 — 18 January 2024

**Product data sheet** 

### 1. General description

The 74ABT126 is a quad buffer/line driver with 3-state outputs controlled by the output enable inputs (nOE). A LOW on nOE causes the outputs to assume a high impedance OFF-state. This device is fully specified for partial power down applications using I<sub>OFF</sub>. The I<sub>OFF</sub> circuitry disables the output, preventing the potentially damaging backflow current through the device when it is powered down.

### 2. Features and benefits

- Supply voltage range from 4.5 V to 5.5 V
- · BiCMOS high speed and output drive
- · Direct interface with TTL levels
- · Power-up 3-state
- I<sub>OFF</sub> circuitry provides partial Power-down mode operation
- · Quad bus interface
- 3-state buffers
- · Live insertion and extraction permitted
- Output capability: +64 mA and -32 mA
- Inputs are disabled during 3-state mode
- Latch-up protection:
  - · JESD78: exceeds 500 mA
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2000 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1000 V

# 3. Ordering information


Table 1. Ordering information

Tubio II Ordoniig ilioniiddoli						
Type number	Package					
	Temperature range	Name	Description	Version		
74ABT126D	-40 °C to +85 °C	SO14	plastic small outline package; 14 leads; body width 3.9 mm	SOT108-1		
74ABT126PW	-40 °C to +85 °C	TSSOP14	plastic thin shrink small outline package; 14 leads; body width 4.4 mm	SOT402-1		




Quad buffer; 3-state

## 4. Functional diagram

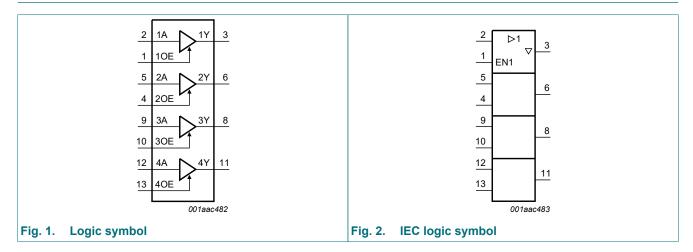

## 5. Pinning information

### 5.1. Pinning

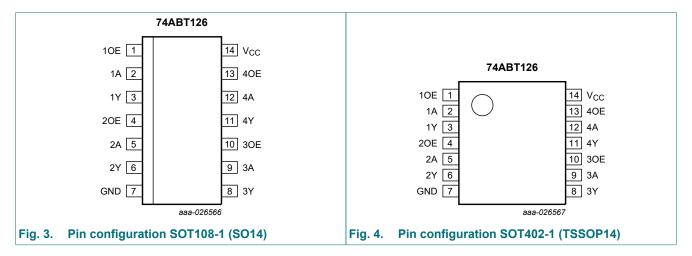

### 5.2. Pin description

Table 2. Pin description

Symbol	Pin	Description
10E, 20E, 30E, 40E	1, 4, 10, 13	output enable inputs
1A, 2A, 3A, 4A	2, 5, 9, 12	data inputs
1Y, 2Y, 3Y, 4Y	3, 6, 8, 11	data outputs
GND	7	ground (0 V)
V <sub>CC</sub>	14	supply voltage

**Product data sheet** 

Quad buffer; 3-state

## 6. Functional description

#### **Table 3. Function table**

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

Input nOE	Output	
nOE	nA	nY
Н	L	L
Н	Н	Н
L	X	Z

## 7. Limiting values

#### **Table 4. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V <sub>CC</sub>	supply voltage			-0.5	+7.0	V
VI	input voltage		[1]	-1.2	+7.0	V
Vo	output voltage	output in OFF-state or HIGH-state	[1]	-0.5	+5.5	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < 0 V		-18	-	mA
lok	output clamping current	V <sub>O</sub> < 0 V		-50	-	mA
Io	output current	output in LOW-state		-	128	mA
Tj	junction temperature			-	150	°C
T <sub>stg</sub>	storage temperature			-65	+150	°C

<sup>[1]</sup> The input and output voltage ratings may be exceeded if the input and output current ratings are observed.

## 8. Recommended operating conditions

Table 5. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
V <sub>CC</sub>	supply voltage		4.5	-	5.5	V
VI	input voltage		0	-	V <sub>CC</sub>	V
I <sub>OH</sub>	HIGH-level output current		-32	-	-	mA
I <sub>OL</sub>	LOW-level output current		-	-	64	mA
Δt/ΔV	input transition rise and fall rate		0	-	10	ns/V
T <sub>amb</sub>	ambient temperature	in free air	-40	-	+85	°C

Quad buffer; 3-state

## 9. Static characteristics

**Table 6. Static characteristics** 

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Ta	<sub>mb</sub> = 25	°C	T <sub>amb</sub> = -45 °C to +85 °C		Unit
				Min	Тур	Max	Min	Max	
V <sub>IK</sub>	input clamping voltage	V <sub>CC</sub> = 4.5 V; I <sub>IK</sub> = -18 mA		-1.2	-0.9	-	-1.2	-	٧
V <sub>IH</sub>	HIGH-level input voltage			2.0	-	-	2.0	-	٧
V <sub>IL</sub>	LOW-level input voltage			-	-	0.8	-	0.8	V
V <sub>OH</sub>	HIGH-level output	$V_{CC}$ = 4.5 V; $V_I$ = $V_{IL}$ or $V_{IH}$							
	voltage	I <sub>OH</sub> = -3 mA		2.5	2.9	-	2.5	-	٧
		I <sub>OH</sub> = -32 mA		2.0	2.4	-	2.0	-	V
		$V_{CC}$ = 5.0 V; $V_I$ = $V_{IL}$ or $V_{IH}$							
		I <sub>OH</sub> = -3 mA		3.0	3.4	-	3.0	-	V
V <sub>OL</sub>	LOW-level output voltage	$V_{CC} = 4.5 \text{ V}; V_I = V_{IL} \text{ or } V_{IH}$							
		I <sub>OL</sub> = 64mA		-	0.35	0.55	-	0.55	V
l <sub>l</sub>	input leakage current	V <sub>CC</sub> = 5.5 V; V <sub>I</sub> = GND or 5.5 V		-	±0.01	±1.0	-	±1.0	μΑ
I <sub>OFF</sub>	power-off leakage current	$V_{CC} = 0 \text{ V}; V_{O} \text{ or } V_{I} \le 4.5 \text{ V}$		-	±5.0	±100	-	±100	μΑ
I <sub>O(pu/pd)</sub>	power-up/power-down output current	$V_{CC}$ = 2.1 V; $V_{O}$ = 0.5 V; $V_{I}$ = GND or $V_{CC}$ ; nOE = don't care			±5.0	±50	-	±50	μΑ
l <sub>OZ</sub>	OFF-state output current	$V_{CC}$ = 5.5 V; $V_I$ = $V_{IL}$ or $V_{IH}$							
		output HIGH-state at V <sub>O</sub> = 2.7 V		-	1.0	50	-	50	μΑ
		output LOW-state at V <sub>O</sub> = 0.5 V		-50	-1.0	-	-50	-	μΑ
I <sub>CEX</sub>	output high leakage current	$V_{CC} = 5.5 \text{ V}; V_{O} = 5.5 \text{ V};$ $V_{I} = \text{GND or } V_{CC}$		-	5.0	50	-	50	μΑ
Io	output current	V <sub>CC</sub> = 5.5 V; V <sub>O</sub> = 2.5 V	[2]	-180	-100	-50	-180	-50	mA
I <sub>CC</sub>	supply current	$V_{CC}$ = 5.5 V; $V_I$ = GND or $V_{CC}$							
		outputs HIGH-state		-	65	250	-	250	μΑ
		outputs LOW-state		-	12	15	-	15	mA
		outputs 3-state		-	65	250	-	250	μΑ
ΔI <sub>CC</sub>	additional supply current	per data input pin; one data input at 3.4 V and other inputs at $V_{CC}$ or GND; $V_{CC}$ = 5.5 V	[3]						
		outputs enabled		-	0.5	1.5	-	1.5	mA
		outputs 3-state		-	50	250	-	250	μΑ
		per enable input pin; one enable input at 3.4 V and other inputs at V <sub>CC</sub> or GND; V <sub>CC</sub> = 5.5 V	[3]						
		outputs 3-state		-	0.5	1.5	-	1.5	mA
Cı	input capacitance	V <sub>I</sub> = 0 V or V <sub>CC</sub>		-	4	-	-	-	pF
Co	output capacitance	outputs disabled; V <sub>O</sub> = 0 V or V <sub>CC</sub>		-	7	-	-	-	pF

<sup>[1]</sup> This parameter is valid for any  $V_{CC}$  between 0 V and 2.1 V, with a transition time of up to 10 ms. From  $V_{CC}$  = 2.1 V to  $V_{CC}$  = 5 V  $\pm$  10 % a transition time of up to 100  $\mu$ s is permitted.

74ABT126

<sup>[2]</sup> Not more than one output should be tested at a time, and the duration of the test should not exceed one second.

<sup>[3]</sup> This is the increase in supply current for each input at 3.4 V.

Quad buffer; 3-state

# 10. Dynamic characteristics

#### **Table 7. Dynamic characteristics**

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 7.

Symbol	ol Parameter Conditions		T <sub>amb</sub> = 25 °C; V <sub>CC</sub> = 5.0 V			T <sub>amb</sub> = -40 ° V <sub>CC</sub> = 5.0	Unit	
			Min	Тур	Max	Min	Max	
t <sub>PLH</sub>	LOW to HIGH propagation delay	nA to nY; see Fig. 5	1.0	2.9	4.2	1.0	4.4	ns
t <sub>PHL</sub>	HIGH to LOW propagation delay	nA to nY; see Fig. 5	1.0	3.0	4.3	1.0	4.6	ns
t <sub>PZH</sub>	OFF-state to HIGH propagation delay	see Fig. 6	1.5	3.2	5.8	1.5	6.5	ns
t <sub>PZL</sub>	OFF-state to LOW propagation delay	see Fig. 6	1.9	4.4	5.9	1.9	6.5	ns
t <sub>PHZ</sub>	HIGH to OFF-state propagation delay	see Fig. 6	1.0	4.2	5.2	1.0	5.8	ns
t <sub>PLZ</sub>	LOW to OFF-state propagation delay	see Fig. 6	1.0	2.9	4.9	1.0	5.5	ns

### 10.1. Waveforms and test circuit


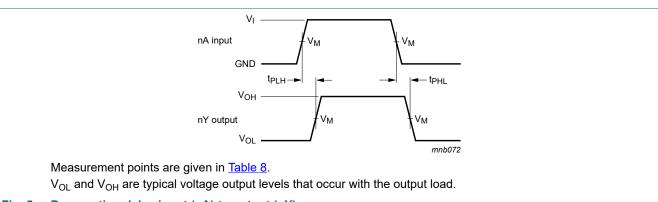


Fig. 5. Propagation delay input (nA) to output (nY)

**Product data sheet** 

Quad buffer; 3-state

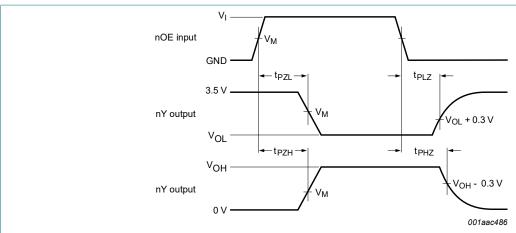


Measurement points are given in Table 8.

 $V_{OL}$  and  $V_{OH}$  are typical voltage output levels that occur with the output load.

Enable and disable times of 3-state outputs Fig. 6.

**Table 8. Measurement points** 

Input	Output
$V_{M}$	$V_{M}$
1.5 V	1.5 V

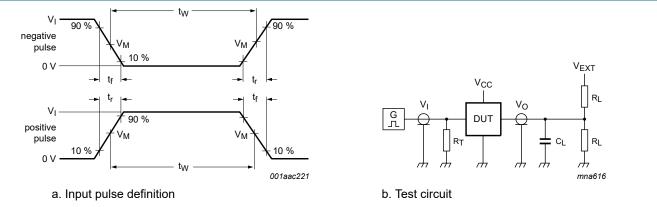

Test data is given in Table 9.

Definitions test circuit:

R<sub>L</sub> = Load resistance.

C<sub>L</sub> = Load capacitance including jig and probe capacitance.

 $R_T$  = Termination resistance should be equal to output impedance  $Z_o$  of the pulse generator.

 $V_{\text{EXT}}$  = Test voltage for switching times.

Test circuit for measuring switching times Fig. 7.

Table 9. Test data

Input			Load		V <sub>EXT</sub>			
VI	f <sub>i</sub>	t <sub>W</sub>	t <sub>r</sub> , t <sub>f</sub>	CL	$R_L$	t <sub>PHZ</sub> , t <sub>PZH</sub>	$t_{PLZ}$ , $t_{PZL}$	t <sub>PLH</sub> , t <sub>PHL</sub>
3.0 V	≤ 1 MHz	500 ns	≤ 2.5 ns	50 pF	500 Ω	open	7.0 V	open

Quad buffer; 3-state

## 11. Package outline

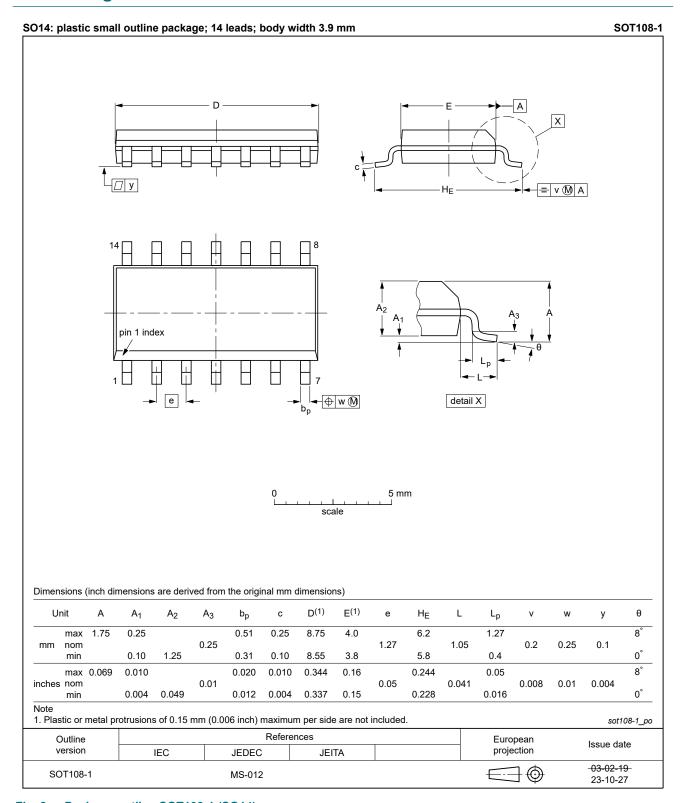


Fig. 8. Package outline SOT108-1 (SO14)

Quad buffer; 3-state

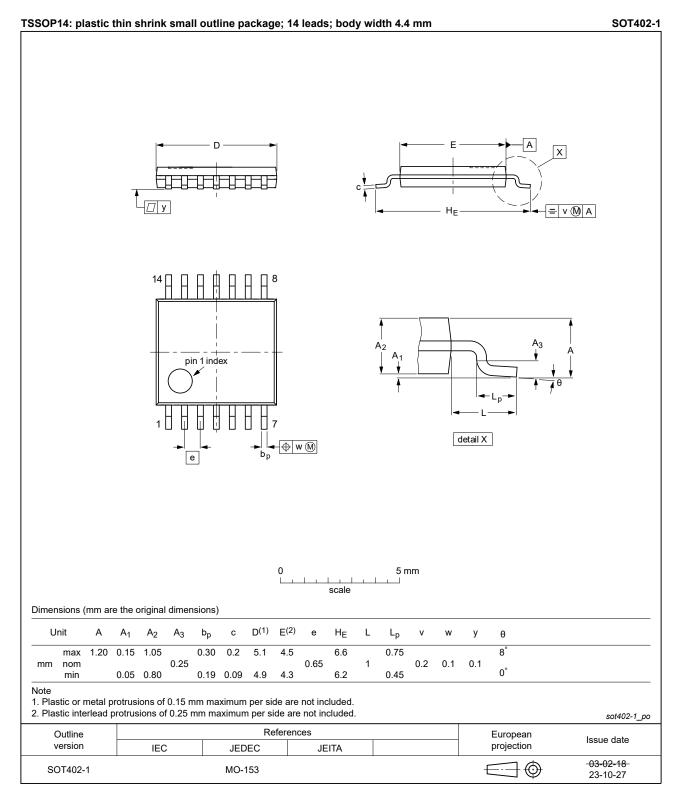


Fig. 9. Package outline SOT402-1 (TSSOP14)

Quad buffer; 3-state

## 12. Abbreviations

#### **Table 10. Abbreviations**

Description				
Sipolar Complementary Metal Oxide Semiconductor				
Charged Device Model				
Device Under Test				
ElectroStatic Discharge				
Human Body Model				
Transistor-Transistor Logic				

# 13. Revision history

### Table 11. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes				
74ABT126 v.7	20240118	Product data sheet	-	74ABT126 v.6				
Modifications:		<ul> <li><u>Section 2</u>: ESD specification updated according to the latest JEDEC standard.</li> <li><u>Fig. 8</u>, <u>Fig. 9</u>: Aligned SO and TSSOP package outline drawings to JEDEC MS-012 and MO-153.</li> </ul>						
74ABT126 v.6	20201008	Product data sheet	-	74ABT126 v.5				
Modifications:		Section 2 updated. 4ABT126DB (SOT337-1 / SS	OP14) removed.					
74ABT126 v.5	20170404	Product data sheet	-	74ABT126 v.4				
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia.</li> <li>Legal texts have been adapted to the new company name where appropriate.</li> </ul>							
74ABT126 v.4	20050217	Product data sheet	-	74ABT126 v.3				
Modifications:	<ul> <li>The format of this data sheet has been redesigned to comply with the new presentation andinformation standard of Philips Semiconductors.</li> <li>Section 2: modified 'JEDEC Std 17' into 'JESD78'.</li> <li>Table 7: changed min value of t<sub>PZH</sub> from 1.9 ns into 1.5 ns for both conditions V<sub>CC</sub> = 5.0 V at T<sub>amb</sub> = 25 °C and V<sub>CC</sub> = 5.0 V ± 0.5 V at T<sub>amb</sub> = -40 °C to +85 °C.</li> </ul>							
74ABT126 v.3	20021213	Product specification	-	74ABT126 v.2				
74ABT126 v.2	19980116	Product specification	-	74ABT126 v.1				
74ABT126 v.1	-	-	-	-				

#### Quad buffer; 3-state

### 14. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <a href="https://www.nexperia.com">https://www.nexperia.com</a>.

#### **Definitions**

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

No offer to sell or license — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

74ABT126

All information provided in this document is subject to legal disclaimers.

© Nexperia B.V. 2024. All rights reserved

### Quad buffer; 3-state

## **Contents**

1. General description	1
2. Features and benefits	1
3. Ordering information	1
4. Functional diagram	2
5. Pinning information	2
5.1. Pinning	2
5.2. Pin description	2
6. Functional description	3
7. Limiting values	3
8. Recommended operating conditions	3
9. Static characteristics	4
10. Dynamic characteristics	5
10.1. Waveforms and test circuit	5
11. Package outline	7
12. Abbreviations	9
13. Revision history	9
14. Legal information	

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com Date of release: 18 January 2024

<sup>©</sup> Nexperia B.V. 2024. All rights reserved