

# NXU0101-Q100

## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Rev. 1 — 30 October 2024

Product data sheet

### 1. General description


The NXU0101-Q100 is a 1-bit, dual-supply level translating buffer with Schmitt-trigger input and 3-state output. It features one data input (A), one data output (YB), and an output enable input (OE).

Both  $V_{CCA}$  and  $V_{CCB}$  can be supplied at any voltage between 0.9 V and 5.5 V making the device suitable for translating between any of the voltage nodes (1.2 V, 1.5 V, 1.8 V, 2.5 V, 3.3 V and 5.0 V).

This device facilitates asynchronous communication between data buses. Transmit data with a fixed direction (unidirectionally) from the A bus to the B bus on one channel. The OE pin can be referenced to  $V_{CCA}$  and  $V_{CCB}$  domain and when OE pin is set LOW the output is disabled and enter a high-impedance OFF-state which isolates the buses. The OE pin can be left floating or externally pulled down to ground to ensure the high-impedance state of the output during power up or power down.

This device ensures low static and dynamic power consumption across the entire supply range and is fully specified for partial power down applications using  $I_{OFF}$ . The  $I_{OFF}$  circuitry prevents potentially damaging backflow current through the device when it is powered down or if one of the power supplies is disconnected (floating).

No power supply sequencing is required and output glitches during power supply transitions are prevented. As a result, glitches will not appear on the output for supply transitions during power-up/down.

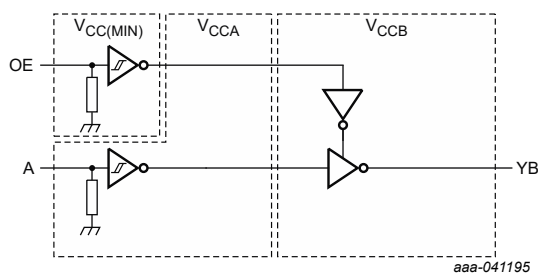

### 2. Features and benefits

- Automotive product qualification in accordance with AEC-Q100 (Grade 1)
  - Specified from -40 °C to +85 °C and from -40 °C to +125 °C
- Wide supply voltage range:
  - $V_{CCA}$ : 0.9 V to 5.5 V
  - $V_{CCB}$ : 0.9 V to 5.5 V
- Low power consumption for supply voltage range 1.1 V to 5.5 V
  - 3  $\mu$ A ( $T_{amb} = 25$  °C)
  - 5  $\mu$ A ( $T_{amb} = -40$  °C to +125 °C)
- Schmitt-trigger inputs with integrated static high ohmic pull-down resistor on the input
- Maximum data rates:
  - 250 Mbps ( $\geq 1.8$  V to 5 V translation)
- High output drive 12 mA at 5 V
- Output enable (OE) allows connection to  $V_{CCA}$  or  $V_{CCB}$  domain
- Suspend mode when either one of the supply voltages is below 100 mV or disconnected (floating)
- Low noise overshoot and undershoot <10% of  $V_{CCO}$
- $I_{OFF}$  circuitry provides partial power-down mode operation
- Latch-up performance exceeds 100 mA per JESD78D Class II
- Complies with JEDEC standard:
  - JESD8-12 (0.9 V to 1.3 V)
  - JESD8-11 (1.4 V to 1.6 V)
  - JESD8-7 (1.65 V to 1.95 V)
  - JESD8-5 (2.3 V to 2.7 V)
  - JESD8C (2.7 V to 3.6 V)
  - JESD12-6 (4.5 V to 5.5 V)
- ESD protection:
  - HBM: ANSI/ESDA/JEDEC JS-001 class 2 exceeds 2500 V
  - CDM: ANSI/ESDA/JEDEC JS-002 class C3 exceeds 1500 V

### 3. Applications

- General purpose I/O level translation
- Noisy environments or slow input signals
- Supports push-pull voltage translation for clock signaling
- Consumer

### 4. Ordering information

Table 1. Ordering information

Type number	Package			Version
	Temperature range	Name	Description	
<a href="#">NXU0101GW-Q100</a>	-40 °C to +125 °C	TSSOP6	plastic thin shrink small outline package; 6 leads; body width 1.25 mm	<a href="#">SOT363-2</a>
<a href="#">NXU0101GM-Q100</a>	-40 °C to +125 °C	XSON6	plastic extremely thin small outline package; no leads; 6 terminals; body 1 × 1.45 × 0.5 mm	<a href="#">SOT886</a>
<a href="#">NXU0101GS-Q100</a>	-40 °C to +125 °C	XSON6	extremely thin small outline package; no leads; 6 terminals; body 1.0 × 1.0 × 0.35 mm	<a href="#">SOT1202</a>


### 5. Marking

Table 2. Marking


Type number	Marking code[1]
NXU0101GW-Q100	L1
NXU0101GM-Q100	L1
NXU0101GS-Q100	L1

[1] The pin 1 indicator is located on the lower left corner of the device, below the marking code.

### 6. Functional diagram

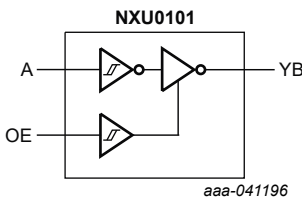

The logic symbol for the NXU0101 shows an input terminal 'A' connected to a Schmitt-trigger buffer. The output of this buffer is connected to a 3-state buffer. The enable input 'OE' is connected to the control input of the 3-state buffer. The output of the 3-state buffer is terminal 'YB'. The symbol is labeled 'NXU0101' and 'aaa-041196'.

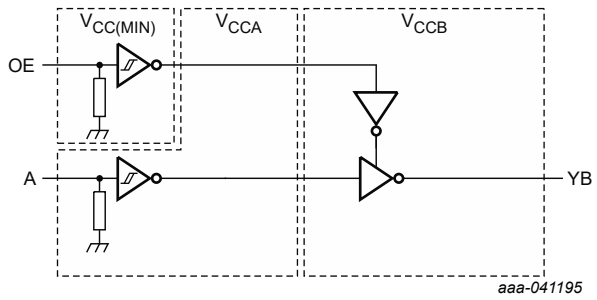


The functional block diagram shows the internal circuitry. It features two input buffers with Schmitt triggers. The top buffer's output is connected to a 3-state buffer. The bottom buffer's output is connected to a 3-state buffer. The circuit is powered by three supply rails: V<sub>CC(MIN)</sub>, V<sub>CCA</sub>, and V<sub>CCB</sub>. The input 'A' and output 'YB' are shown. The diagram is labeled 'aaa-041195'.

**Fig. 1. Logic symbol**

**Fig. 2. Functional block diagram**

## 7. Pinning information

### 7.1. Pinning

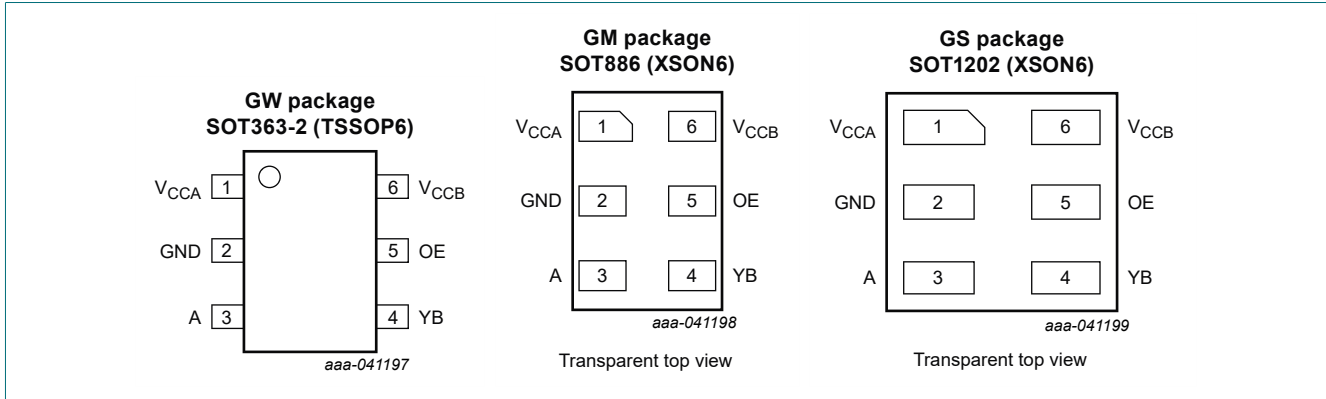

### 7.2. Pin description

Table 3. Pin description

Symbol	Pin	I/O	Description
V <sub>CCA</sub>	1	supply	supply voltage A-side (pin A)
GND	2	supply	ground (0 V)
A	3	I	data input A-side and referenced to V <sub>CCA</sub>
YB	4	O	data output B-side and referenced to V <sub>CCB</sub>
OE	5	I	output enable input (active HIGH)
V <sub>CCB</sub>	6	-	supply voltage B-side (pin YB)

## 8. Functional description

Table 4. Function table

H = HIGH voltage level; L = LOW voltage level; X = don't care; Z = high-impedance OFF-state.

Supply voltage	Input	Input	Output
V <sub>CCA</sub> , V <sub>CCB</sub>	OE	A	YB
0.9 V to 5.5 V	H	L	L
0.9 V to 5.5 V	H	H	H
0.9 V to 5.5 V	L	X	Z
GND [1]	X	X	Z
Floating [2]	X	X	Z

[1] If either V<sub>CCA</sub> or V<sub>CCB</sub> is below 100 mV or GND, the device goes into suspend mode (Hi-Z).

[2] If either V<sub>CCA</sub> or V<sub>CCB</sub> disconnected (floating), the device goes into suspend mode (Hi-Z).

### 8.1. Overview

The NXU0101-Q100 is a 1-bit, dual-supply level translating buffer with a Schmitt-trigger input and 3-state output. It features one data input (A), one data output (YB), and an output enable input (OE). Both V<sub>CCA</sub> and V<sub>CCB</sub> can be supplied at any voltage between 0.9 V and 5.5 V.

### 8.2. Inputs



The inputs have integrated pull-down resistors of 6.5 MΩ (typical) which prevent an undefined state at the Schmitt-trigger input and the output. If an external pull-up is required, it should be no larger than 1 MΩ to avoid contention with the 6.5 MΩ internal pull-down.

Additionally, the input is provided with a through Schmitt-trigger which makes this device tolerant for slow and noisy input signals. Prolonged input slopes at a slow rate may lead to increased dynamic current consumption.

The output-enable input (OE) can be referenced to V<sub>CCA</sub> and V<sub>CCB</sub> domain by making use of the developed V<sub>CC(MIN)</sub> circuitry. When the OE pin is set LOW, the output is disabled and enters high-impedance OFF-state which isolates the output. The OE pin can be left floating or externally pulled down to ground to ensure outputs remain in the high-impedance state during power up or power down.

The input signals can be safely driven above the supply voltage, as long as the maximum input voltage value specified in the Recommended Operating Conditions is not exceeded.



### Input transfer characteristics

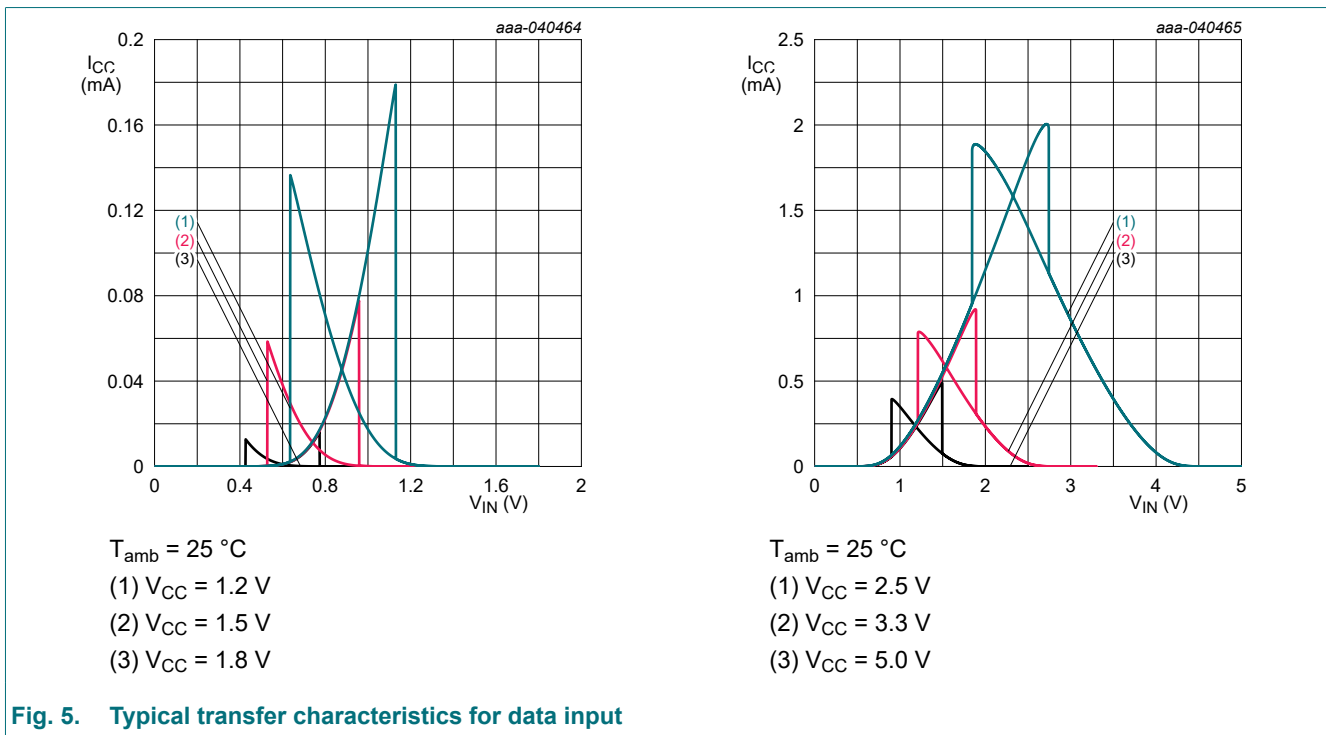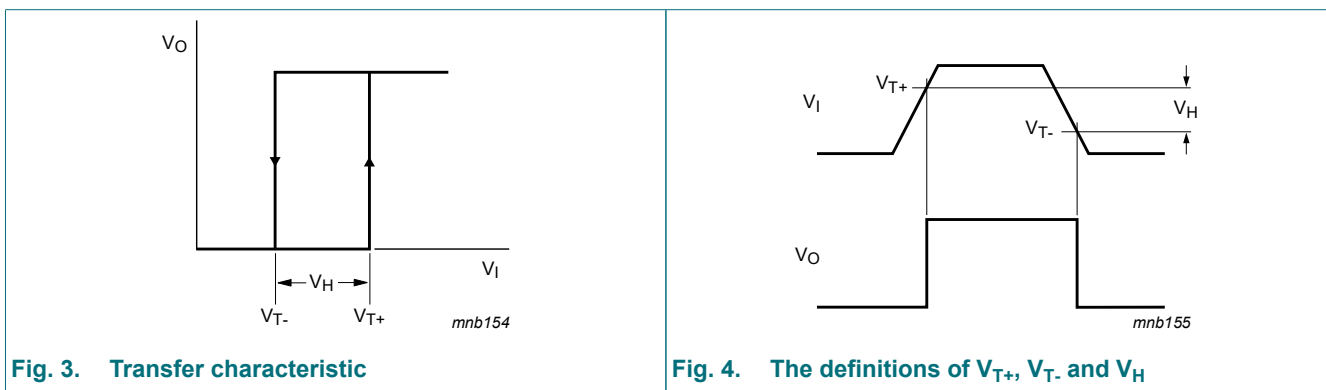

### 8.3. Output

Balanced output enables the device to both sink and source similar currents. The high drive capability of this device creates fast edges and capable of driving larger currents.

#### Output transfer characteristics

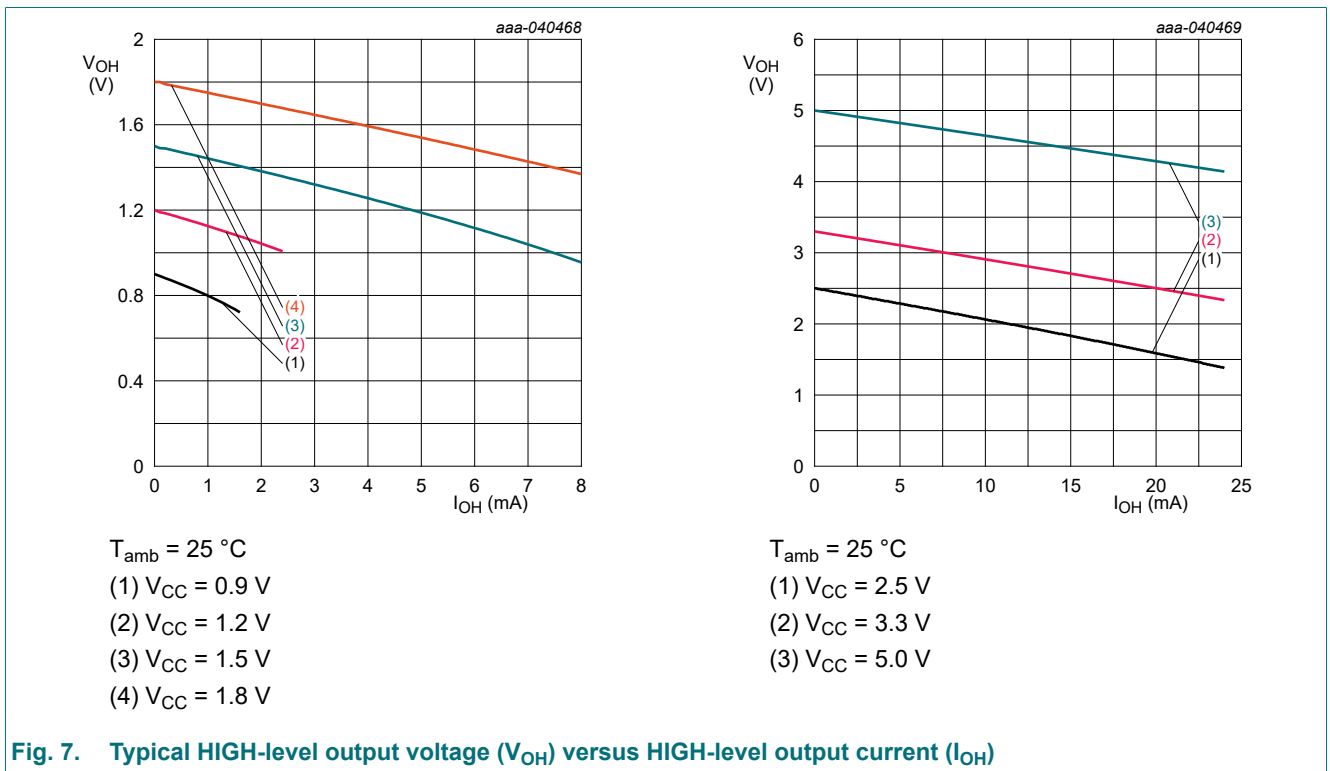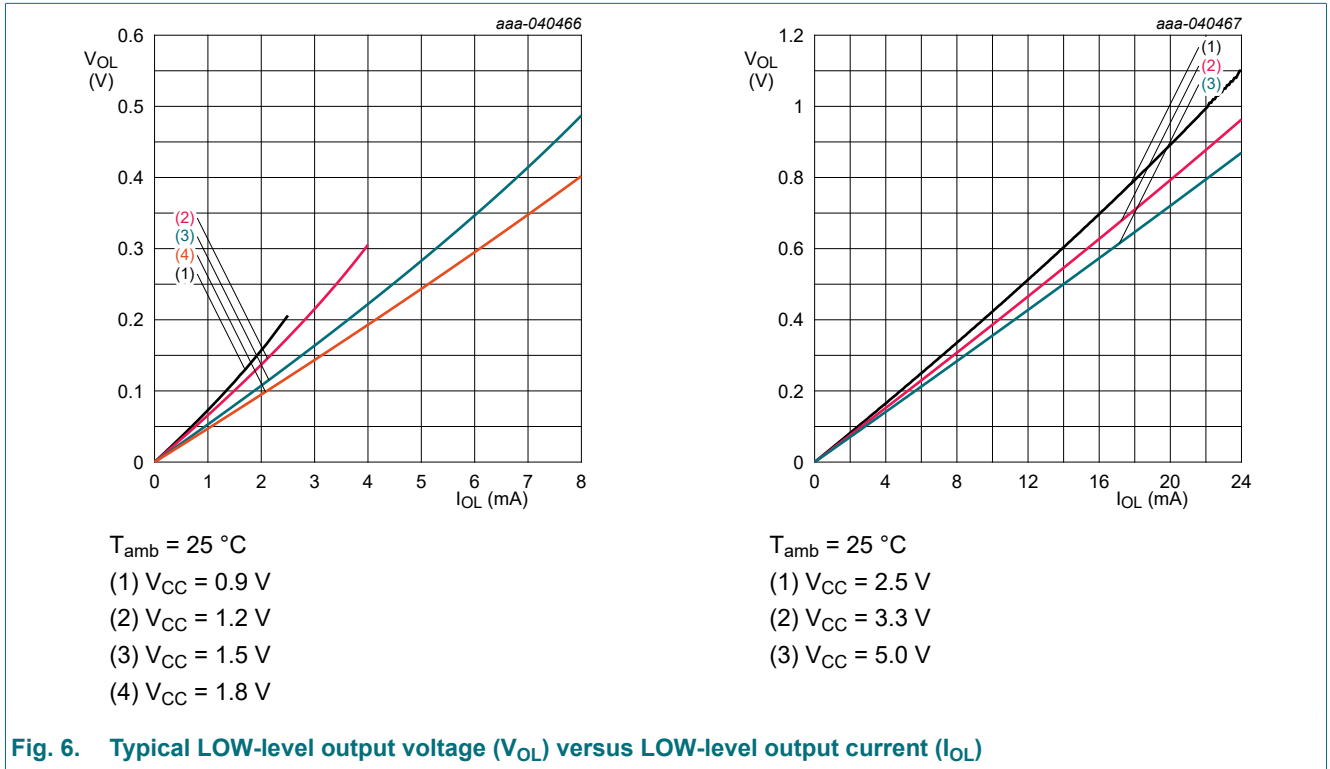

### 8.4. Suspend mode and I<sub>OFF</sub> protection circuitry

When either V<sub>CCA</sub> or V<sub>CCB</sub> drops below 100 mV or becomes disconnected (floating) the product enters suspend mode (Hi-Z). The output is disabled and in transition to a high-impedance OFF-state. The I<sub>OFF</sub> circuitry prevents potentially damaging backflow current through the device when it is powered down or if one of the power supplies is disconnected (floating). It is advisable to keep the data input in low state before disconnecting (floating) either supply.

Below a graphical explanation:

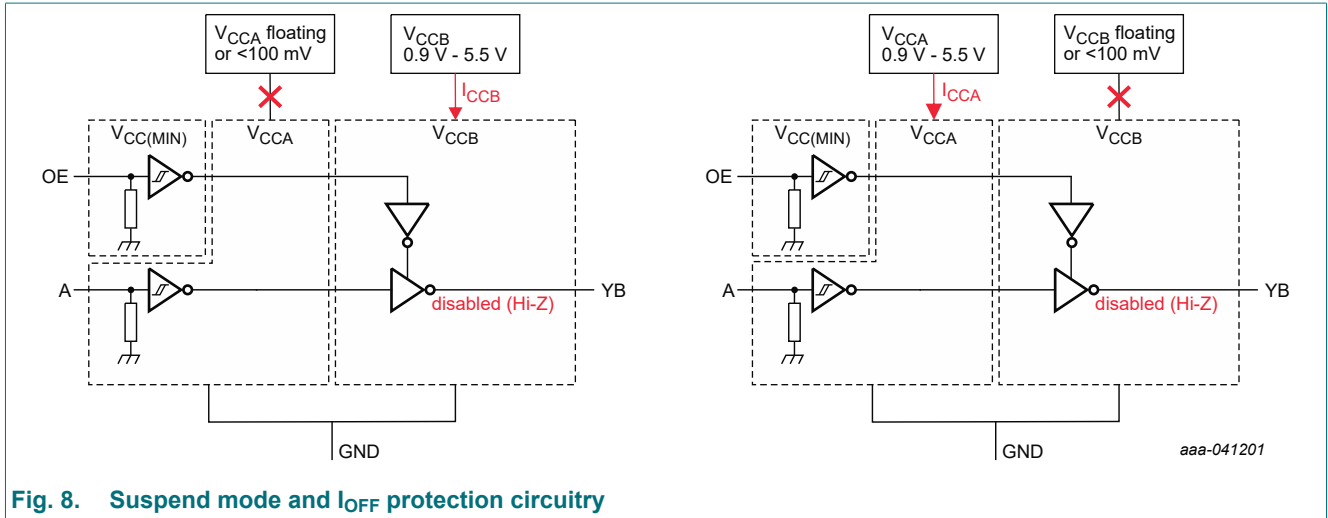


Fig. 8. Suspend mode and I<sub>OFF</sub> protection circuitry

## 9. Limiting values

Table 5. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Max	Unit
V <sub>CCA</sub>	supply voltage A		-0.5	+6.5	V
V <sub>CCB</sub>	supply voltage B		-0.5	+6.5	V
I <sub>IK</sub>	input clamping current	V <sub>I</sub> < 0 V	-50	-	mA
V <sub>I</sub>	input voltage		-0.5	+6.5	V
I <sub>OK</sub>	output clamping current	V <sub>O</sub> < 0 V	-50	-	mA
V <sub>O</sub>	output voltage	Active mode	-0.5	V <sub>CCO</sub> + 0.5	V
		Suspend or 3-state mode	-0.5	+6.5	V
I <sub>O</sub>	output current	V <sub>O</sub> = 0 V to V <sub>CCO</sub>	-	±25	mA
I <sub>CC</sub>	supply current	I <sub>CCA</sub> or I <sub>CCB</sub> ; per V <sub>CC</sub> pin	-	100	mA
I <sub>GND</sub>	ground current	per GND pin	-100	-	mA
T <sub>stg</sub>	storage temperature		-65	+150	°C
P <sub>tot</sub>	total power dissipation		-	250	mW

- [1] The minimum input voltage ratings and output voltage ratings may be exceeded if the input and output current ratings are observed.
- [2] V<sub>CCO</sub> is the supply voltage associated with the output pin.
- [3] V<sub>CCO</sub> + 0.5 V should not exceed 6.5 V.
- [4] For SOT363-2 (TSSOP6) package: P<sub>tot</sub> derates linearly with 5.6 mW/K above 106 °C.  
 For SOT886 (XSON6) package: P<sub>tot</sub> derates linearly with 3.8 mW/K above 84 °C.  
 For SOT1202 (XSON6) package: P<sub>tot</sub> derates linearly with 4.3 mW/K above 92 °C

## 10. ESD ratings

Table 6. ESD ratings

Symbol	Parameter	Conditions	Value	Unit
$V_{\text{ESD}}$	electrostatic discharge voltage	HBM: ANSI/ESDA/JEDEC JS-001 class 2	$\pm 2500$	V
		CDM: ANSI/ESDA/JEDEC JS-002 class C3	$\pm 1500$	V

## 11. Recommended operating conditions

Table 7. Recommended operating conditions

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{\text{CCA}}$	supply voltage A		0.9	5.5	V
$V_{\text{CCB}}$	supply voltage B		0.9	5.5	V
$V_{\text{I}}$	input voltage		0	5.5	V
$V_{\text{O}}$	output voltage	Active mode [1]	0	$V_{\text{CCO}}$	V
		Suspend or 3-state mode	0	5.5	V
$T_{\text{amb}}$	ambient temperature		-40	+125	°C

[1]  $V_{\text{CCO}}$  is the supply voltage associated with the output pin.

## 12. Thermal characteristics

Table 8. Thermal characteristics

Symbol	Parameter	Condition	SOT363-2	SOT886	SOT1202	SOT1255-2	Unit
$R_{\text{th(j-a)}}$	thermal resistance from junction to ambient	in free air; JEDEC test board	177	264	231	231	°C/W
$R_{\text{th(j-c)}}$	thermal resistance from case (top) of package	in free air; JEDEC test board	128	129	128	130	°C/W
$\Psi_{\text{j-top}}$	thermal characterization parameter from junction to top of package	in free air; JEDEC test board	34	5.1	4.7	4.1	°C/W

### 13. Static characteristics

**Table 9. Static characteristics**

At recommended operating conditions; voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	+25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit	
			Min	Typ	Max	Min	Max	Min	Max		
V <sub>T+</sub>	positive-going threshold voltage	A input									
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.58	-	-	-	-	-	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.71	-	0.44	0.88	0.44	0.88	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.89	-	0.60	0.98	0.60	0.98	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	1.05	-	0.76	1.13	0.76	1.13	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	1.39	-	1.08	1.56	1.08	1.56	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	1.75	-	1.48	1.92	1.48	1.92	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	2.50	-	2.19	2.74	2.19	2.74	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	3.02	-	2.65	3.33	2.65	3.33	V	
		OE input (referenced to V <sub>CCA</sub> or V <sub>CCB</sub> )									
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.58	-	-	-	-	-	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.70	-	0.44	0.88	0.44	0.88	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.89	-	0.60	0.98	0.60	0.98	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	1.04	-	0.76	1.13	0.76	1.13	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	1.38	-	1.08	1.56	1.08	1.56	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	1.74	-	1.48	1.92	1.48	1.92	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	2.50	-	2.19	2.74	2.19	2.74	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	3.03	-	2.65	3.33	2.65	3.33	V	



## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Symbol	Parameter	Conditions	+25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
V <sub>T-</sub>	negative-going threshold voltage	A input								
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.33	-	-	-	-	-	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.40	-	0.17	0.48	0.17	0.48	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.50	-	0.28	0.59	0.28	0.59	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	0.59	-	0.35	0.69	0.35	0.69	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	0.84	-	0.56	0.97	0.56	0.97	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	1.12	-	0.89	1.5	0.89	1.5	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	1.71	-	1.51	1.97	1.51	1.97	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	2.10	-	1.88	2.4	1.88	2.4	V
		OE input (referenced to V <sub>CCA</sub> or V <sub>CCB</sub> )								
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.33	-	-	-	-	-	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.41	-	0.17	0.48	0.17	0.48	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.51	-	0.28	0.59	0.28	0.59	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	0.59	-	0.35	0.69	0.35	0.69	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	0.84	-	0.56	0.97	0.56	0.97	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	1.12	-	0.89	1.5	0.89	1.5	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	1.69	-	1.51	1.97	1.51	1.97	V
		V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	2.07	-	1.88	2.46	1.88	2.46	V

## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Symbol	Parameter	Conditions	+25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit	
			Min	Typ	Max	Min	Max	Min	Max		
V <sub>H</sub>	hysteresis voltage	A input									
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.25	-	-	-	-	-	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.31	-	0.2	0.4	0.2	0.4	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.39	-	0.25	0.5	0.25	0.5	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	0.46	-	0.3	0.55	0.3	0.55	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	0.59	-	0.38	0.65	0.38	0.65	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	0.63	-	0.46	0.72	0.46	0.72	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	0.79	-	0.58	0.93	0.58	0.93	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	0.93	-	0.69	1.06	0.69	1.06	V	
		OE input (referenced to V <sub>CCA</sub> or V <sub>CCB</sub> )									
		V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V	-	0.25	-	-	-	-	-	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.1 V	-	0.30	-	0.15	0.41	0.15	0.41	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.4 V	-	0.39	-	0.2	0.5	0.2	0.5	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 1.65 V	-	0.44	-	0.23	0.55	0.23	0.55	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 2.3 V	-	0.54	-	0.32	0.65	0.32	0.65	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 3.0 V	-	0.62	-	0.39	0.72	0.39	0.72	V	
		V <sub>CCA</sub> = V <sub>CCB</sub> = 4.5 V	-	0.81	-	0.57	0.97	0.57	0.97	V	
V <sub>CCA</sub> = V <sub>CCB</sub> = 5.5 V	-	0.96	-	0.69	1.18	0.69	1.18	V			
V <sub>OH</sub>	HIGH-level output voltage	V <sub>I</sub> = V <sub>T+(MAX)</sub> [1][2]									
		I <sub>O</sub> = -0.1 mA; V <sub>CCO</sub> = 0.9 V to 5.5 V	V <sub>CCO</sub> - 0.1	0.9	-	V <sub>CCO</sub> - 0.1	-	V <sub>CCO</sub> - 0.1	-	V	
		I <sub>O</sub> = -1.5 mA; V <sub>CCO</sub> = 1.1 V	0.825	1.0	-	0.825	-	0.825	-	V	
		I <sub>O</sub> = -3 mA; V <sub>CCO</sub> = 1.4 V	1.05	1.2	-	1.05	-	1.05	-	V	
		I <sub>O</sub> = -4.5 mA; V <sub>CCO</sub> = 1.65 V	1.2	1.4	-	1.2	-	1.2	-	V	
		I <sub>O</sub> = -8 mA; V <sub>CCO</sub> = 2.3 V	1.7	1.94	-	1.7	-	1.7	-	V	
		I <sub>O</sub> = -10 mA; V <sub>CCO</sub> = 3.0 V	2.2	2.6	-	2.2	-	2.2	-	V	
		I <sub>O</sub> = -12 mA; V <sub>CCO</sub> = 4.5 V	3.7	4.1	-	3.7	-	3.7	-	V	

## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Symbol	Parameter	Conditions	+25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
V <sub>OL</sub>	LOW-level output voltage	V <sub>I</sub> = V <sub>T-(MIN)</sub> [1][2]								
		I <sub>O</sub> = 0.1 mA; V <sub>CCO</sub> = 0.9 V to 5.5 V	-	0	0.1	-	0.1	-	0.1	V
		I <sub>O</sub> = 1.5 mA; V <sub>CCO</sub> = 1.1 V	-	0.12	0.275	-	0.275	-	0.275	V
		I <sub>O</sub> = 3 mA; V <sub>CCO</sub> = 1.4 V	-	0.17	0.35	-	0.35	-	0.35	V
		I <sub>O</sub> = 4.5 mA; V <sub>CCO</sub> = 1.65 V	-	0.23	0.45	-	0.45	-	0.45	V
		I <sub>O</sub> = 8 mA; V <sub>CCO</sub> = 2.3 V	-	0.35	0.7	-	0.7	-	0.7	V
		I <sub>O</sub> = 10 mA; V <sub>CCO</sub> = 3.0 V	-	0.39	0.8	-	0.8	-	0.8	V
		I <sub>O</sub> = 8 mA; V <sub>CCO</sub> = 4.5 V	-	0.28	0.5	-	0.5	-	0.5	V
		I <sub>O</sub> = 12 mA; V <sub>CCO</sub> = 4.5 V	-	0.43	0.8	-	0.8	-	0.8	V
I <sub>I</sub>	input leakage current	A input; V <sub>I</sub> = 0 V to 5.5 V; V <sub>CCI</sub> = 0.9 V to 5.5 V [3]	-0.1	1	1.5	-0.1	1.85	-0.1	2	μA
		OE input; V <sub>I</sub> = 0 V to 5.5 V; V <sub>CCI</sub> = 0.9 V to 5.5 V [3]	-0.1	1	1.5	-0.1	1.85	-0.1	2	μA
I <sub>OZ</sub>	OFF-state output current	suspend mode YB output; V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V to 5.5 V; V <sub>I</sub> = 0 V or V <sub>CCI</sub> ; V <sub>O</sub> = 0 V or V <sub>CCO</sub> OE = GND [1]	-0.1	-	0.1	-0.5	0.5	-2	2	μA
I <sub>OFF</sub>	power-off leakage current	YB output; V <sub>I</sub> or V <sub>O</sub> = 0 V to 5.5 V; V <sub>CCA</sub> = 0 V; V <sub>CCB</sub> = 0.9 V to 5.5 V	-1.5	-	1.5	-1.85	1.85	-2	2	μA
		YB output; V <sub>I</sub> or V <sub>O</sub> = 0 V to 5.5 V; V <sub>CCB</sub> = 0 V; V <sub>CCA</sub> = 0.9 V to 5.5 V	-1.5	-	1.5	-1.85	1.85	-2	2	μA
		YB output; V <sub>I</sub> or V <sub>O</sub> = GND; V <sub>CCA</sub> = floating; V <sub>CCB</sub> = 0.9 V to 5.5 V [4]	-1.5	-	1.5	-1.85	1.85	-2	2	μA
		YB output; V <sub>I</sub> or V <sub>O</sub> = GND; V <sub>CCB</sub> = floating; V <sub>CCA</sub> = 0.9 V to 5.5 V [4]	-1.5	-	1.5	-1.85	1.85	-2	2	μA

## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Symbol	Parameter	Conditions	+25 °C			-40 °C to +85 °C		-40 °C to +125 °C		Unit
			Min	Typ	Max	Min	Max	Min	Max	
I <sub>CC</sub>	supply current	I <sub>CCA</sub> ; V <sub>I</sub> = 0 V or V <sub>CCI</sub> ; I <sub>O</sub> = 0 A [3]								
		V <sub>CCA</sub> , V <sub>CCB</sub> = 0.9 V to 5.5 V	-	1	1.8	-	2.5	-	3	μA
		V <sub>CCA</sub> = 5.5 V; V <sub>CCB</sub> = 0 V	-	1	1.8	-	2.5	-	3	μA
		V <sub>CCA</sub> = 0 V; V <sub>CCB</sub> = 5.5 V	-0.1	-	0.1	-0.4	0.4	-1	1	μA
		I <sub>CCB</sub> ; V <sub>I</sub> = 0 V or V <sub>CCI</sub> ; I <sub>O</sub> = 0 A [3]								
		V <sub>CCA</sub> , V <sub>CCB</sub> = 0.9 V to 5.5 V	-	1	1.8	-	2.5	-	3	μA
		V <sub>CCB</sub> = 5.5 V; V <sub>CCA</sub> = 0 V	-	1	1.8	-	2.5	-	3	μA
		V <sub>CCB</sub> = 0 V; V <sub>CCA</sub> = 5.5 V	-0.1	-	0.1	-0.4	0.4	-1	1	μA
		I <sub>CCA</sub> or I <sub>CCB</sub> ; V <sub>I</sub> or V <sub>O</sub> = GND; I <sub>O</sub> = 0 A								
		I <sub>CCA</sub> ; V <sub>CCB</sub> = floating; V <sub>CCA</sub> = 5.5 V [4]	-	1	1.5	-	2.5	-	3	μA
		I <sub>CCB</sub> ; V <sub>CCA</sub> = floating; V <sub>CCB</sub> = 5.5 V [4]	-	1	1.5	-	2.5	-	3	μA
		I <sub>CCA</sub> + I <sub>CCB</sub> combined; V <sub>I</sub> = 0 V or V <sub>CCI</sub> ; I <sub>O</sub> = 0 A; V <sub>CCA</sub> = V <sub>CCB</sub> = 0.9 V to 5.5 V [3]	-	2	3	-	4.5	-	5	μA

[1] V<sub>CCO</sub> is the supply voltage associated with the output pin.

[2] Typical values for V<sub>OL</sub> and V<sub>OH</sub> are measured at V<sub>CCO</sub> is 0.9 V.

[3] V<sub>CCI</sub> is the supply voltage associated with the control input or data input pin.

[4] Floating is defined, if one of the supply pins is not actively driven externally and has a leakage not exceeding 10 nA

Table 10. Typical total supply current  $I_{CCA}$  at  $T_{amb} = 25\text{ °C}$ 

Voltages are referenced to GND (ground = 0 V).

$V_{CCA}$	$V_{CCB}$								Unit
	0 V	0.9 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	5.0 V	
0 V	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	$\mu\text{A}$
0.9 V	0.2	0.2	0.2	0.2	0.2	0.2	0.2	0.2	$\mu\text{A}$
1.2 V	0.3	0.3	0.3	0.3	0.3	0.3	0.3	0.3	$\mu\text{A}$
1.5 V	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	$\mu\text{A}$
1.8 V	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	$\mu\text{A}$
2.5 V	0.4	0.4	0.4	0.4	0.4	0.4	0.4	0.4	$\mu\text{A}$
3.3 V	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	$\mu\text{A}$
5.0 V	0.9	0.9	0.9	0.9	0.9	0.9	0.9	0.9	$\mu\text{A}$

Table 11. Typical total supply current  $I_{CCB}$  at  $T_{amb} = 25\text{ °C}$ 

Voltages are referenced to GND (ground = 0 V).

$V_{CCA}$	$V_{CCB}$								Unit
	0 V	0.9 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	5.0 V	
0 V	0.00	0.01	0.01	0.01	0.01	0.01	0.01	0.01	$\mu\text{A}$
0.9 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
1.2 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
1.5 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
1.8 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
2.5 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
3.3 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.7	$\mu\text{A}$
5.0 V	0.01	0.2	0.25	0.3	0.4	0.45	0.5	0.9	$\mu\text{A}$

## 14. Dynamic characteristics

**Table 12. Maximum data rate and output skew**

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12.

Symbol	Parameter	Conditions	T <sub>amb</sub> = -40 °C to +125 °C			Unit
			Min	Typ	Max	
f <sub>data</sub>	data rate	50% duty cycle input; one channel switching; 20% of pulse > 0.7xV <sub>CCO</sub> ; 20% of pulse < 0.3xV <sub>CCO</sub> [1]				
		<b>Up translation</b> [1][2]				
		V <sub>CCI</sub> = 3.0 V to 3.6 V; V <sub>CCO</sub> = 4.5 V to 5.5 V	-	350	250	Mbps
		V <sub>CCI</sub> = 1.65 V to 1.95 V; V <sub>CCO</sub> = 4.5 V to 5.5 V	-	350	250	Mbps
		V <sub>CCI</sub> = 1.1 V to 1.3 V; V <sub>CCO</sub> = 4.5 V to 5.5 V	-	220	100	Mbps
		V <sub>CCI</sub> = 1.65 V to 1.95 V; V <sub>CCO</sub> = 3.0 V to 3.6 V	-	230	150	Mbps
		V <sub>CCI</sub> = 1.1 V to 1.3 V; V <sub>CCO</sub> = 3.0 V to 3.6 V	-	300	140	Mbps
		V <sub>CCI</sub> = 1.1 V to 1.3 V; V <sub>CCO</sub> = 1.65 V to 1.95 V	-	100	40	Mbps
		<b>Down translation</b> [1][2]				
		V <sub>CCI</sub> = 4.5 V to 5.5 V; V <sub>CCO</sub> = 3.0 V to 3.6 V	-	250	170	Mbps
		V <sub>CCI</sub> = 4.5 V to 5.5 V; V <sub>CCO</sub> = 1.65 V to 1.95 V	-	150	60	Mbps
		V <sub>CCI</sub> = 4.5 V to 5.5 V; V <sub>CCO</sub> = 1.1 V to 1.3 V	-	80	30	Mbps
		V <sub>CCI</sub> = 3.0 V to 3.6 V; V <sub>CCO</sub> = 1.65 V to 1.95 V	-	150	60	Mbps
		V <sub>CCI</sub> = 3.0 V to 3.6 V; V <sub>CCO</sub> = 1.1 V to 1.3 V	-	80	30	Mbps
		V <sub>CCI</sub> = 1.65 V to 1.95 V; V <sub>CCO</sub> = 1.1 V to 1.3 V	-	70	30	Mbps

[1] V<sub>CCO</sub> is the supply voltage associated with the output pin.

[2] V<sub>CCI</sub> is the supply voltage associated with the control input or data input pin.

1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

**Table 13. Typical dynamic characteristics at  $V_{CCA} = 0.9\text{ V}$  and  $T_{amb} = 25\text{ }^{\circ}\text{C}$**

*Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12; for waveforms see Fig. 9, Fig. 11 and Fig. 10.*

Symbol	Parameter	Conditions	$V_{CCB}$							Unit
			0.9 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	5.0 V	
$t_{pd}$	propagation delay	A to YB [1]	61	44	41	39.5	38.5	38.5	39.4	ns
$t_{dis}$	disable time	OE to YB [1]	67	51	47	47	44	44	42	ns
$t_{en}$	enable time	OE to YB [1]	67	51	47	47	44	44	42	ns

[1]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $t_{dis}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ ;  $t_{en}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .

**Table 14. Typical dynamic characteristics at  $V_{CCB} = 0.9\text{ V}$  and  $T_{amb} = 25\text{ }^{\circ}\text{C}$**

*Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12; for waveforms see Fig. 9, Fig. 11 and Fig. 10.*

Symbol	Parameter	Conditions	$V_{CCA}$							Unit
			0.9 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	5.0 V	
$t_{pd}$	propagation delay	A to YB [1]	61	44	41	39.5	38.5	38.5	39.4	ns
$t_{dis}$	disable time	OE to YB [1]	67	68	70	72	76	81	94	ns
$t_{en}$	enable time	OE to YB [1]	70	60	52	52	52	50	50	ns

[1]  $t_{pd}$  is the same as  $t_{PLH}$  and  $t_{PHL}$ ;  $t_{dis}$  is the same as  $t_{PLZ}$  and  $t_{PHZ}$ ;  $t_{en}$  is the same as  $t_{PZL}$  and  $t_{PZH}$ .

**Table 15. Typical dynamic characteristics at  $T_{amb} = 25\text{ }^{\circ}\text{C}$**

*Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12.*

Symbol	Parameter	Conditions	Supply voltage ( $V_{CCA} = V_{CCB}$ )							Unit
			0.9 V	1.2 V	1.5 V	1.8 V	2.5 V	3.3 V	5.0 V	
$C_{PD}$	power dissipation capacitance	$V_{CCA}$ [1][2][3] $f_i = 10\text{ MHz}$ ; $V_i = \text{GND to } V_{CCI}$ ; $t_r = t_f = 1\text{ ns}$ ; $C_L = 0\text{ pF}$ ; $R_L = \infty\ \Omega$								
		A to YB; output disabled	1.5	1.6	1.7	1.7	1.9	2.1	2.7	pF
		A to YB; output enabled	1.5	1.6	1.7	1.7	1.9	2.1	2.7	pF
		$V_{CCB}$ [1][2][3] $f_i = 10\text{ MHz}$ ; $V_i = \text{GND to } V_{CCI}$ ; $t_r = t_f = 1\text{ ns}$ ; $C_L = 0\text{ pF}$ ; $R_L = \infty\ \Omega$								
		A to YB; output disabled	1.5	1.6	1.7	1.7	1.9	2.1	2.7	pF
		A to YB; output enabled	10	10.4	10.6	10.7	10.9	11.3	12.1	pF
$C_i$	input capacitance	$V_i = 0\text{ V or } V_{CCI}$ [2]	1.9	1.9	1.9	1.9	1.9	1.9	1.9	pF
$C_o$	output capacitance	OE = GND; $V_{CCA} = 3.3\text{ V}$ ; $V_{CCB} = 3.3\text{ V}$ ; $V_o = 0\text{ V or } V_{CCI}$	3.2	3.2	3.2	3.2	3.2	3.2	3.2	pF

[1]  $C_{PD}$  per channel is used to determine the dynamic power dissipation ( $P_{DYN}$  in  $\mu\text{W}$ ).

$$P_{DYN} = N \times (C_{PD} \times V_{CCI}^2 \times f_i) + N \times (C_L \times V_{CCO}^2 \times f_o) \text{ where:}$$

$f_i$  = input frequency in MHz;

$f_o$  = output frequency in MHz;

$C_L$  = load capacitance in pF;

$V_{CCI}$  = the supply voltage associated with the input pins in V;

$V_{CCO}$  = the supply voltage associated with the output pin in V;

$N$  = total number of inputs or outputs switching.

[2]  $V_{CCI}$  is the supply voltage associated with the data input pin.

[3]  $V_{CCO}$  is the supply voltage associated with the output pin.

## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Table 16. Dynamic characteristics for temperature range -40 °C to +85 °C

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12; for waveforms see Fig. 9, Fig. 11 and Fig. 10.

Symbol	Parameter	Conditions	V <sub>CCB</sub>												Unit
			1.2 V ± 0.1 V		1.5 V ± 0.1 V		1.8 V ± 0.15 V		2.5 V ± 0.2 V		3.3 V ± 0.3 V		5.0 V ± 0.5 V		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t <sub>pd</sub>	propagation delay	A to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	6.0	42.1	5.3	30.1	5.0	26.5	4.7	22.8	4.7	21.5	4.7	21.9	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	5.3	33.4	4.6	21.4	4.2	18.1	3.8	14.6	3.8	13.3	3.8	12.7	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	5.0	31.3	4.3	19.2	3.5	15.6	3.4	12.4	3.4	11.2	3.4	10.1	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	4.6	29.5	3.7	17.3	3.4	13.6	3.0	10.1	2.9	8.8	2.9	7.7	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	4.6	29.1	3.8	16.6	3.5	12.9	3.1	9.4	2.9	7.9	2.8	6.8	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	4.8	29.6	4.1	16.3	3.7	12.5	3.2	8.7	2.9	7.3	2.6	6.1	ns
t <sub>en</sub>	enable time	OE to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	8.5	42.8	7.7	31.8	7.4	28.5	7.2	25.5	7.2	24.6	7.2	24.2	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	7.9	39.4	6.4	23.1	5.8	19.8	5.6	16.7	5.6	15.7	5.6	15.2	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	7.5	38.5	6.1	22.2	5.2	17.2	4.7	13.7	4.6	12.5	4.6	11.8	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	7.1	37.5	5.3	21.3	4.4	16.1	3.9	10.7	3.7	9.5	3.7	8.6	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	6.6	37.1	5.1	20.8	4.1	15.5	3.4	10.1	3.3	8.2	3.2	7.3	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	6.2	36.5	4.5	20.2	3.6	15.1	2.9	9.4	2.6	7.4	2.6	6.2	ns
t <sub>dis</sub>	disable time	OE to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	11.7	44.1	10.9	37.2	11.5	36.2	10.6	32.9	10.8	33.7	9.9	32.2	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	11.6	44.2	8.5	26.4	8.9	25.1	7.4	21.6	7.4	22.1	7.4	20.2	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	11.6	44.4	8.4	26.3	6.9	21.3	5.3	18.1	5.3	18.4	6.3	16.3	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	11.6	44.9	8.3	26.4	7.1	21.3	4.7	17.9	6.0	15.3	4.6	13.7	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	11.3	45.6	8.2	26.6	6.7	21.4	4.1	15.1	4.9	14.6	4.1	12.2	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	11.3	47.1	8.4	27.2	6.4	24.6	3.4	16.7	4.9	17.1	3.1	12.7	ns

[1] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>; t<sub>dis</sub> is the same as t<sub>PLZ</sub> and t<sub>PHZ</sub>; t<sub>en</sub> is the same as t<sub>PZL</sub> and t<sub>PZH</sub>.



## 1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

Table 17. Dynamic characteristics for temperature range -40 °C to +125 °C

Voltages are referenced to GND (ground = 0 V); for test circuit see Fig. 12; for waveforms see Fig. 9, Fig. 11 and Fig. 10.

Symbol	Parameter	Conditions	V <sub>CCB</sub>												Unit
			1.2 V ± 0.1 V		1.5 V ± 0.1 V		1.8 V ± 0.15 V		2.5 V ± 0.2 V		3.3 V ± 0.3 V		5.0 V ± 0.5 V		
			Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	Min	Max	
t <sub>pd</sub>	propagation delay	A to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	6.0	42.1	5.3	31.1	5.0	27.4	4.7	23.6	4.7	22.2	4.7	22.3	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	5.3	34.1	4.6	22.6	4.2	19.2	3.8	15.7	3.8	14.2	3.8	13.4	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	5.0	31.8	4.3	20.4	3.5	16.6	3.4	13.3	3.4	12.1	3.4	10.7	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	4.6	29.9	3.7	18.3	3.4	14.5	3.0	10.9	2.9	9.4	2.9	8.2	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	4.6	29.5	3.8	17.6	3.5	13.7	3.1	10.1	2.9	8.5	2.8	7.2	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	4.8	29.9	4.1	17.2	3.7	13.2	3.2	9.3	2.9	7.7	2.6	6.4	ns
t <sub>en</sub>	enable time	OE to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	8.5	43.3	7.7	32.7	7.4	29.4	7.2	26.2	7.2	25.3	7.2	24.8	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	7.9	39.8	6.4	24.3	6.1	21.1	5.6	17.6	5.6	16.5	5.6	15.9	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	7.5	38.9	6.1	23.4	5.2	18.2	4.7	14.6	4.6	13.3	4.6	12.6	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	7.1	37.9	5.3	22.4	4.4	17.2	3.9	11.5	3.7	10.2	3.7	9.2	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	6.6	37.4	5.1	21.9	4.1	16.5	3.4	10.8	3.3	8.8	3.2	7.7	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	6.2	36.9	4.5	21.4	3.6	16.1	2.9	10.2	2.6	8.1	2.6	6.5	ns
t <sub>dis</sub>	disable time	OE to YB [1]													
		V <sub>CCA</sub> = 1.2 V ± 0.1 V	11.7	45.2	10.9	38.2	11.5	36.8	10.6	33.2	10.8	33.9	9.9	33.4	ns
		V <sub>CCA</sub> = 1.5 V ± 0.1 V	11.6	45.2	8.5	27.8	8.9	26.3	7.4	22.6	7.4	23.2	7.4	21.2	ns
		V <sub>CCA</sub> = 1.8 V ± 0.15 V	11.6	45.4	8.4	27.8	6.9	22.6	5.3	19.2	5.3	19.5	6.3	17.3	ns
		V <sub>CCA</sub> = 2.5 V ± 0.2 V	11.6	45.8	8.3	27.9	7.1	22.6	4.7	18.9	6.0	16.0	4.6	14.1	ns
		V <sub>CCA</sub> = 3.3 V ± 0.3 V	11.3	46.4	8.2	28.2	6.7	22.7	4.1	15.5	4.9	15.0	4.1	12.8	ns
		V <sub>CCA</sub> = 5.0 V ± 0.5 V	11.3	59.2	8.4	28.8	6.4	25.6	3.4	16.9	4.9	17.1	3.1	13.3	ns

[1] t<sub>pd</sub> is the same as t<sub>PLH</sub> and t<sub>PHL</sub>; t<sub>dis</sub> is the same as t<sub>PLZ</sub> and t<sub>PZH</sub>; t<sub>en</sub> is the same as t<sub>PZL</sub> and t<sub>PZH</sub>.

14.1. Waveforms and test circuit

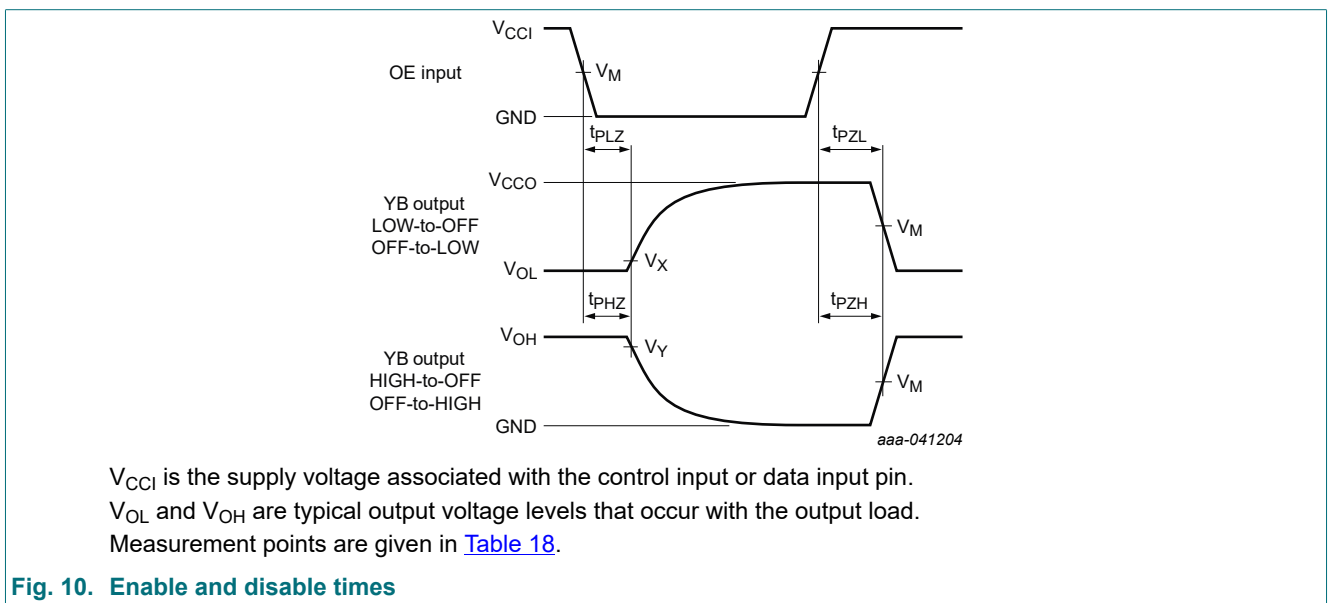
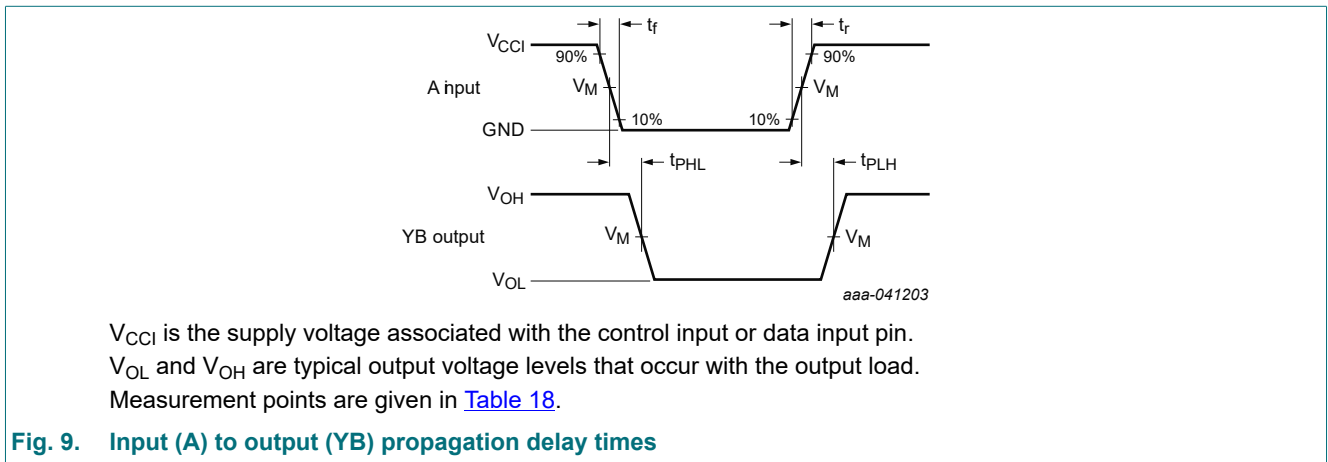


Table 18. Measurement points

Supply voltage	Input[1]	Output[2]		
$V_{CCA}, V_{CCB}$	$V_M$	$V_M$	$V_X$	$V_Y$
0.9 V to 1.6 V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.1 \text{ V}$	$V_{OH} - 0.1 \text{ V}$
1.65 V to 2.7 V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.15 \text{ V}$	$V_{OH} - 0.15 \text{ V}$
3.0 V to 5.5 V	$0.5 \times V_{CCI}$	$0.5 \times V_{CCO}$	$V_{OL} + 0.3 \text{ V}$	$V_{OH} - 0.3 \text{ V}$

[1]  $V_{CCI}$  is the supply voltage associated with the control input or data input pin.  
 [2]  $V_{CCO}$  is the supply voltage associated with the output pin.

1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state






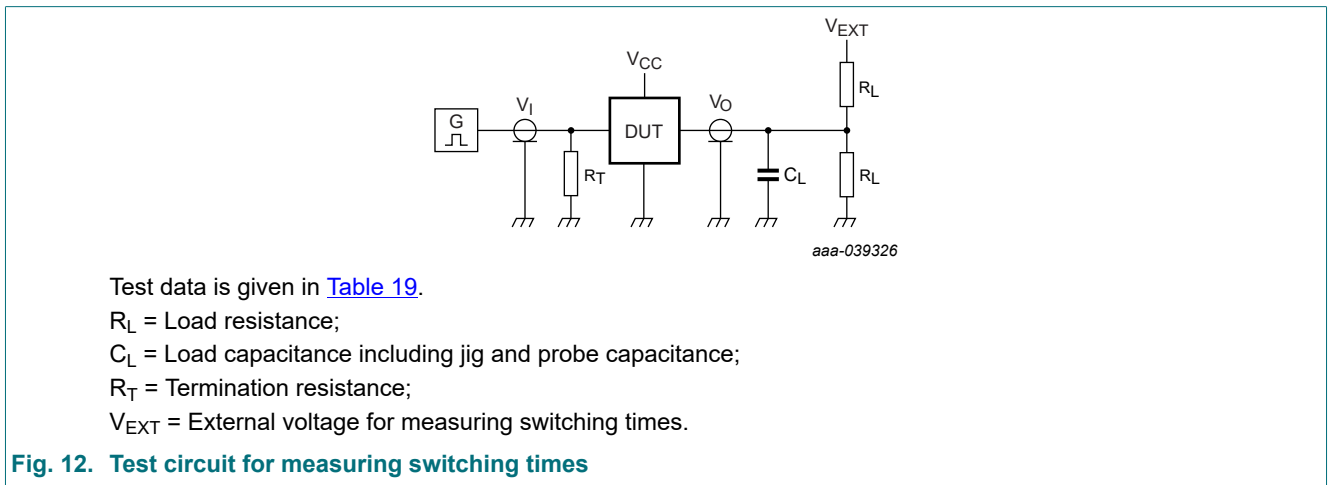


Table 19. Test data


Supply voltage	Load		Input		VEXT		
VCCA, VCCB	CL	RL	tr, tf	VI [1]	tPLH, tPHL	tPZH, tPHZ	tPZL, tPLZ [2]
0.9 V to 5.5 V	5 pF	10 kΩ	≤1.0 ns/V	VCCI	open	GND	2 × VCCO

[1] VCCI is the supply voltage associated with the control input or data input pin.  
[2] VCCO is the supply voltage associated with the output pin.

14.2. Additional propagation delay versus load capacitance graphs

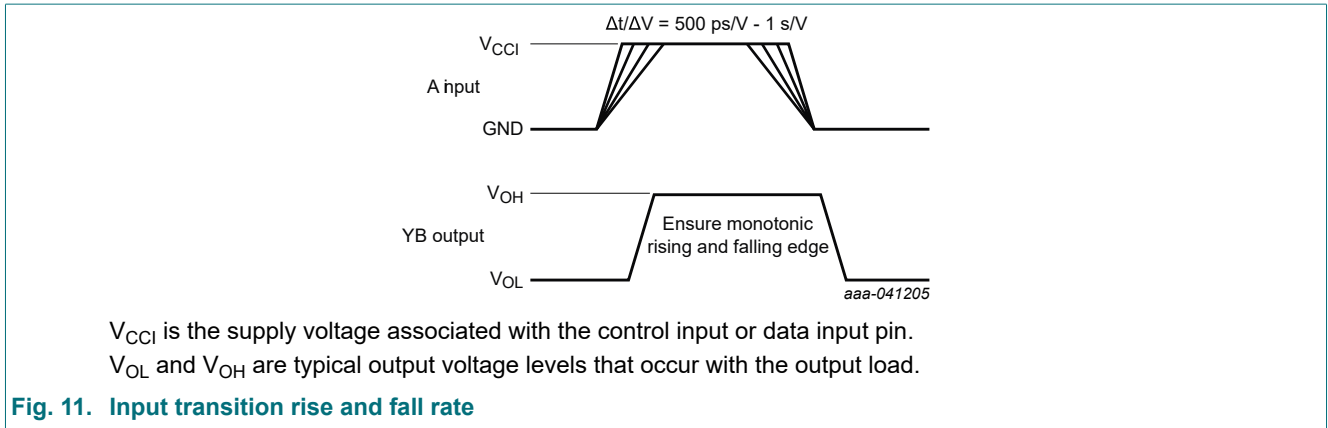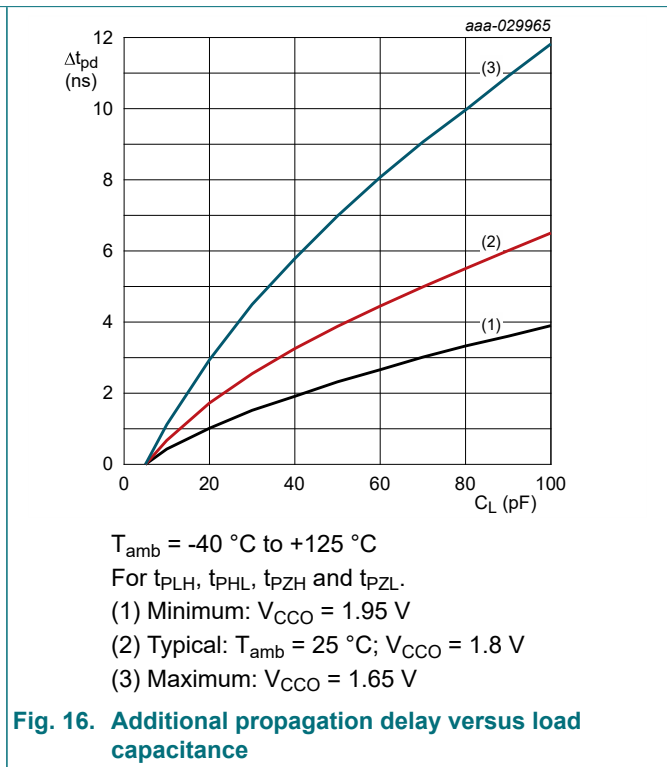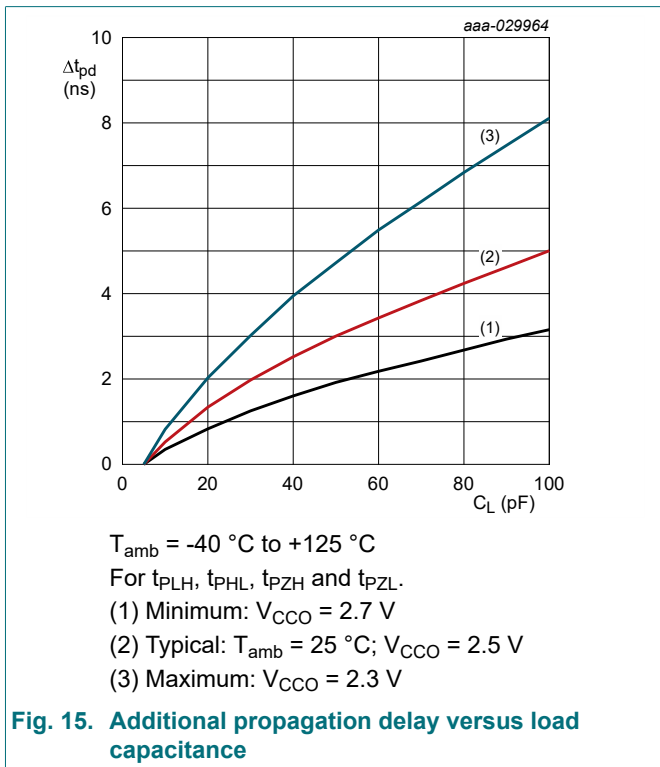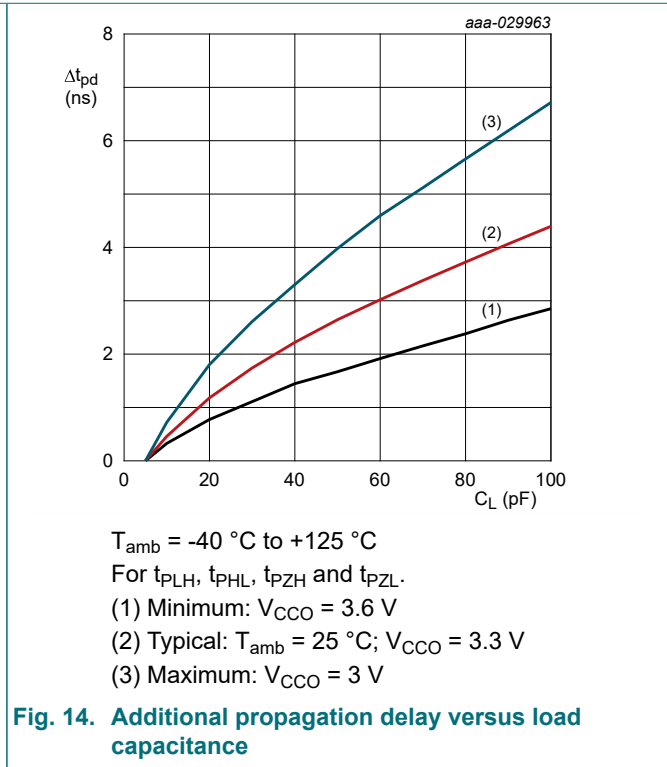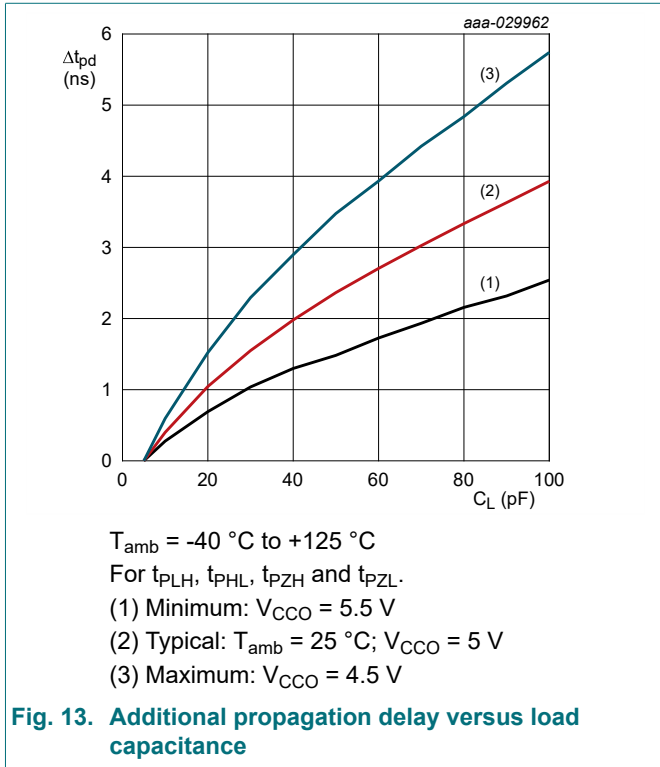


1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

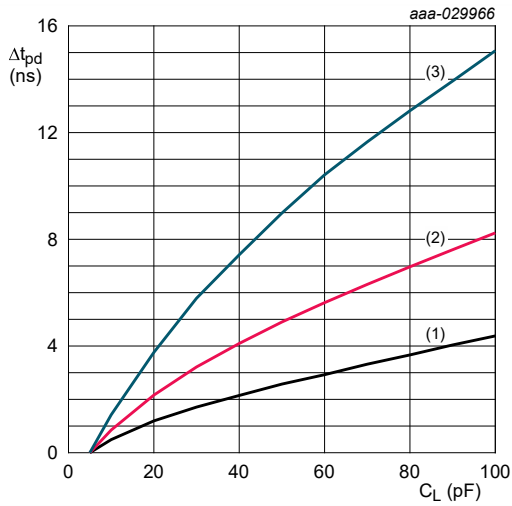


$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$   
 For  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_{PZH}$  and  $t_{PZL}$ .  
 (1) Minimum:  $V_{CCO} = 1.6\text{ V}$   
 (2) Typical:  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CCO} = 1.5\text{ V}$   
 (3) Maximum:  $V_{CCO} = 1.4\text{ V}$

Fig. 17. Additional propagation delay versus load capacitance

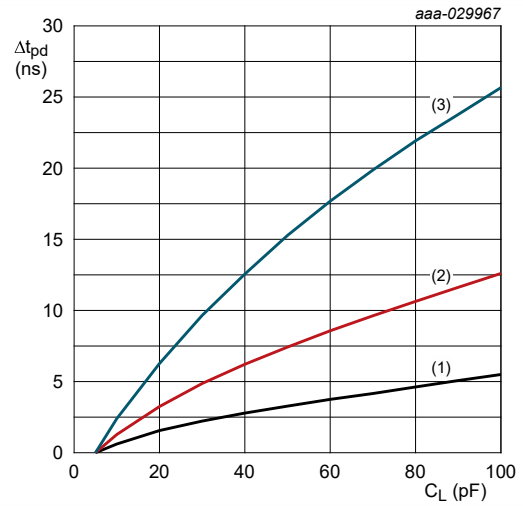

$T_{amb} = -40\text{ }^{\circ}\text{C}$  to  $+125\text{ }^{\circ}\text{C}$   
 For  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_{PZH}$  and  $t_{PZL}$ .  
 (1) Minimum:  $V_{CCO} = 1.3\text{ V}$   
 (2) Typical:  $T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  $V_{CCO} = 1.2\text{ V}$   
 (3) Maximum:  $V_{CCO} = 1.1\text{ V}$

Fig. 18. Additional propagation delay versus load capacitance

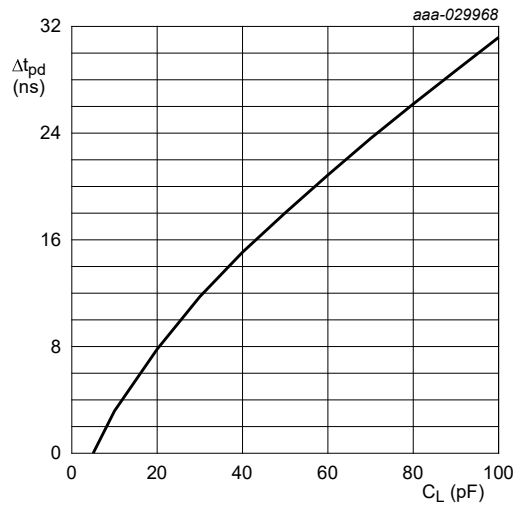

$T_{amb} = 25\text{ }^{\circ}\text{C}$ ;  
 For  $t_{PLH}$ ,  $t_{PHL}$ ,  $t_{PZH}$  and  $t_{PZL}$ .  
 $V_{CCO} = 0.9\text{ V}$

Fig. 19. Additional propagation delay versus load capacitance

## 15. Application information

### NXU0101-Q100

The NXU0101-Q100 is a 1-bit level-shifting transceiver suitable for level-translation purposes. This device is ideal in any application requiring level-shifting between two voltage domains and especially designed for applications where push-pull drivers are utilized to the data input pins. Below an example of possible GPIO application.

#### Typical GPIO application

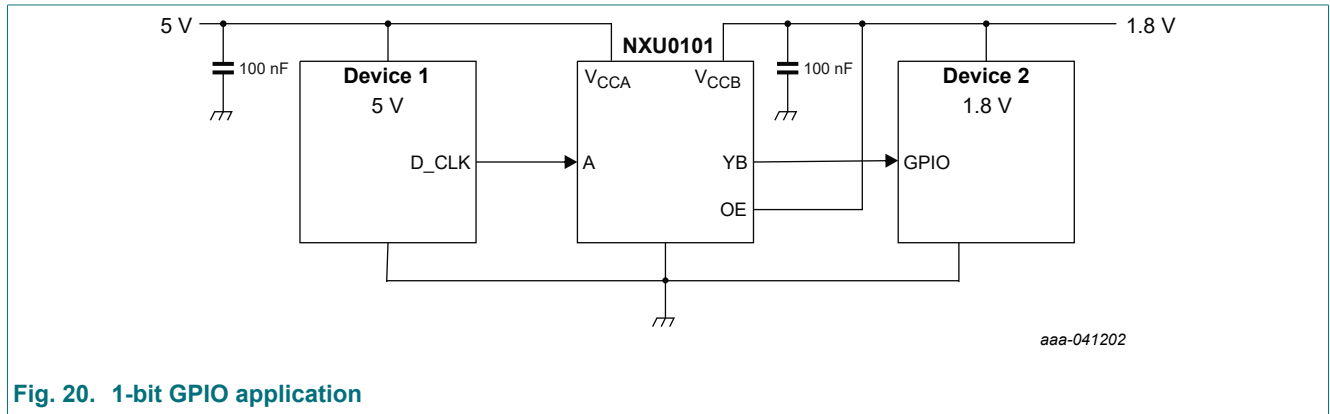


Fig. 20. 1-bit GPIO application

### 16. Package outline

TSSOP6: plastic thin shrink small outline package; 6 leads; body width 1.25 mm

SOT363-2

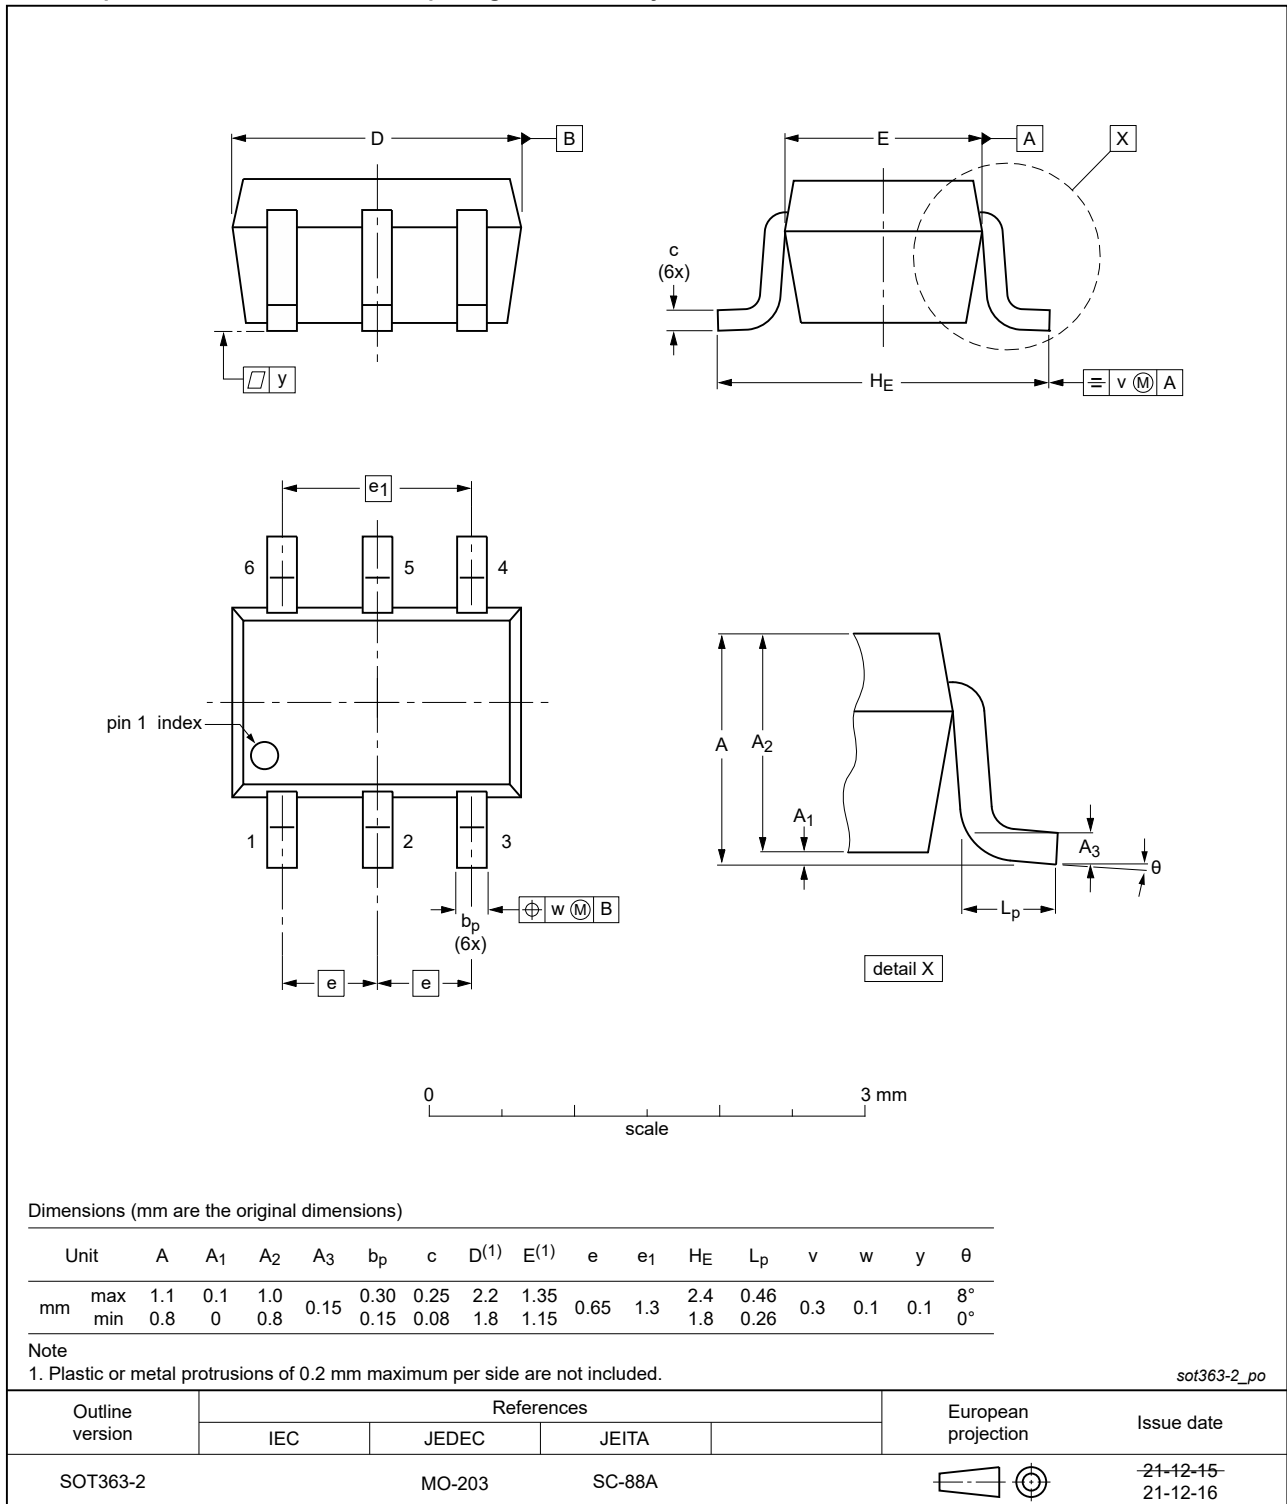


Fig. 21. Package outline SOT363-2 (TSSOP6)

1-bit dual-supply buffer/level translator with Schmitt-trigger; 3-state

XSON6: plastic extremely thin small outline package; no leads; 6 terminals; body 1 x 1.45 x 0.5 mm

SOT886



Fig. 22. Package outline SOT886 (XSON6)



XSON6: extremely thin small outline package; no leads;  
6 terminals; body 1.0 x 1.0 x 0.35 mm

SOT1202



Fig. 23. Package outline SOT1202 (XSON6)

## 17. Abbreviations

Table 20. Abbreviations

Acronym	Description
ANSI	American National Standards Institute
CDM	Charged Device Model
DUT	Device Under Test
ESD	ElectroStatic Discharge
ESDA	Earth Sciences Data Standards
GPIO	General Purpose Input/Output
HBM	Human Body Model
JEDEC	Joint Electron Device Engineering Council

## 18. Revision history

Table 21. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
NXU0101-Q100 v.1	20241029	Product data sheet	-	-

## 19. Legal information

### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use in automotive applications** — This Nexperia product has been qualified for use in automotive applications. Unless otherwise agreed in writing, the product is not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or

equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

<b>1. General description</b> .....	<b>1</b>
<b>2. Features and benefits</b> .....	<b>1</b>
<b>3. Applications</b> .....	<b>2</b>
<b>4. Ordering information</b> .....	<b>2</b>
<b>5. Marking</b> .....	<b>2</b>
<b>6. Functional diagram</b> .....	<b>2</b>
<b>7. Pinning information</b> .....	<b>3</b>
7.1. Pinning.....	3
7.2. Pin description.....	3
<b>8. Functional description</b> .....	<b>3</b>
8.1. Overview.....	3
8.2. Inputs.....	4
8.3. Output.....	5
8.4. Suspend mode and I <sub>OFF</sub> protection circuitry.....	6
<b>9. Limiting values</b> .....	<b>6</b>
<b>10. ESD ratings</b> .....	<b>7</b>
<b>11. Recommended operating conditions</b> .....	<b>7</b>
<b>12. Thermal characteristics</b> .....	<b>7</b>
<b>13. Static characteristics</b> .....	<b>8</b>
<b>14. Dynamic characteristics</b> .....	<b>14</b>
14.1. Waveforms and test circuit.....	18
14.2. Additional propagation delay versus load capacitance graphs.....	20
<b>15. Application information</b> .....	<b>22</b>
<b>16. Package outline</b> .....	<b>23</b>
<b>17. Abbreviations</b> .....	<b>26</b>
<b>18. Revision history</b> .....	<b>26</b>
<b>19. Legal information</b> .....	<b>27</b>

© Nexperia B.V. 2024. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 30 October 2024