



# P6SMB series

## 600 W Transient Voltage Suppressor

2 January 2025

Product data sheet

### 1. General description

600 W uni- and bi-directional Transient Voltage Suppressor (TVS) in a SMB Surface-Mounted Device (SMD) plastic package, designed for transient voltage protection.

### 2. Features and benefits

- Rated peak pulse power at 10/1000  $\mu$ s waveform:  $P_{PPM} = 600$  W
- Reverse standoff voltage:  $V_{RWM} = 7.02$  V to 214 V
- Reverse current:  $I_R$  less than 1  $\mu$ A for  $V_{RWM} \geq 11.1$  V
- Excellent clamping capability
- Small plastic package suitable for surface-mounted design

### 3. Applications

- Power supply protection
- Power management
- Telecom, Computer, Industrial and Consumer electronics application

### 4. Quick reference data


Table 1. Quick reference data

Symbol	Parameter	Conditions		Min	Typ	Max	Unit
$V_{RWM}$	reverse standoff voltage	$T_{amb} = 25$ °C		7.02	-	214	V
$P_{PPM}$	rated peak pulse power	$t_p = 10/1000$ $\mu$ s; $T_{amb} = 25$ °C	[1]	-	-	600	W

[1] In accordance with IEC 61643-321 (10/1000  $\mu$ s current waveform).

## 5. Pinning information

Table 2. Pinning information

Pin	Description uni-directional	Description bi-directional	Simplified outline	Graphic symbol
1	cathode [1] [2]	cathode 1	 <p>Transparent top view</p> <p><b>SMB (SOD1002-1)</b></p>	<p>sym035</p> <p>sym045</p>
2	anode	cathode 2		

[1] The marking bar indicates the cathode for uni-directional device.

[2] Marking bar is used for uni-directional device only.

## 6. Ordering information

Table 3. Ordering information

Type number[1]	Package		
	Name	Description	Version
P6SMB series	SMB	plastic, surface mounted package; 2 terminals; 4.32 mm × 3.62 mm × 2.30 mm body	SOD1002-1

[1] The series consists of 74 types with reverse standoff voltages from 7.02 V to 214 V.

## 7. Marking

Table 4. Marking codes

Type number	Marking code	Type number	Marking code
P6SMBJ8.2A	AP2	P6SMBJ8.2CA	AU7
P6SMBJ9.1A	AP3	P6SMBJ9.1CA	AU8
P6SMBJ10A	AP4	P6SMBJ10CA	AU9
P6SMBJ11A	AP5	P6SMBJ11CA	AV2
P6SMBJ12A	AP6	P6SMBJ12CA	AV3
P6SMBJ13A	AP7	P6SMBJ13CA	AV4
P6SMBJ15A	AP8	P6SMBJ15CA	AV5
P6SMBJ16A	AP9	P6SMBJ16CA	AV6
P6SMBJ18A	AR2	P6SMBJ18CA	AV7
P6SMBJ20A	AR3	P6SMBJ20CA	AV8
P6SMBJ22A	AR4	P6SMBJ22CA	AV9
P6SMBJ24A	AR5	P6SMBJ24CA	AW2
P6SMBJ27A	AR6	P6SMBJ27CA	AW3
P6SMBJ30A	AR7	P6SMBJ30CA	AW4
P6SMBJ33A	AR8	P6SMBJ33CA	AW5
P6SMBJ36A	AR9	P6SMBJ36CA	AW6
P6SMBJ39A	AS2	P6SMBJ39CA	AW7
P6SMBJ43A	AS3	P6SMBJ43CA	AW8
P6SMBJ47A	AS4	P6SMBJ47CA	AW9

Type number	Marking code	Type number	Marking code
P6SMBJ51A	AS5	P6SMBJ51CA	AX2
P6SMBJ56A	AS6	P6SMBJ56CA	AX3
P6SMBJ62A	AS7	P6SMBJ62CA	AX4
P6SMBJ68A	AS8	P6SMBJ68CA	AX5
P6SMBJ75A	AS9	P6SMBJ75CA	AX6
P6SMBJ82A	AT2	P6SMBJ82CA	AX7
P6SMBJ91A	AT3	P6SMBJ91CA	AX8
P6SMBJ100A	AT4	P6SMBJ100CA	AX9
P6SMBJ110A	AT5	P6SMBJ110CA	AY2
P6SMBJ120A	AT6	P6SMBJ120CA	AY3
P6SMBJ130A	AT7	P6SMBJ130CA	AY4
P6SMBJ150A	AT8	P6SMBJ150CA	AY5
P6SMBJ160A	AT9	P6SMBJ160CA	AY6
P6SMBJ170A	AU2	P6SMBJ170CA	AY7
P6SMBJ180A	AU3	P6SMBJ180CA	AY8
P6SMBJ200A	AU4	P6SMBJ200CA	AY9
P6SMBJ220A	AU5	P6SMBJ220CA	AZ2
P6SMBJ250A	AU6	P6SMBJ250CA	AZ3

## 8. Limiting values

**Table 5. Limiting values**

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions		Min	Max	Unit
<b>Per diode</b>						
$P_{PPM}$	rated peak pulse power	$t_p = 10/1000 \mu s$	[1]	-	600	W
$I_{PPM}$	rated peak pulse current	$t_p = 10/1000 \mu s$	[1]	-	see table 8	A
$T_j$	junction temperature			-	150	°C
$T_{amb}$	ambient temperature			-55	150	°C
$T_{stg}$	storage temperature			-55	150	°C

[1] In accordance with IEC 61643-321 (10/1000  $\mu s$  current waveform).



**Table 6. ESD maximum ratings**

Symbol	Parameter	Conditions		Min	Max	Unit
<b>Per diode</b>						
$V_{ESD}$	electrostatic discharge voltage	IEC 61000-4-2; contact discharge; $T_{amb} = 25^\circ C$	[1]	-	30	kV

[1] Device stressed with ten non-repetitive ESD pulses.

**Table 7. ESD standards compliance**

Standard	
<b>Per diode</b>	
IEC 61000-4-2; level 4 (ESD)	> 15 kV (air); > 8 kV (contact)
MIL-STD-883; class 3 (human body model)	> 4 kV

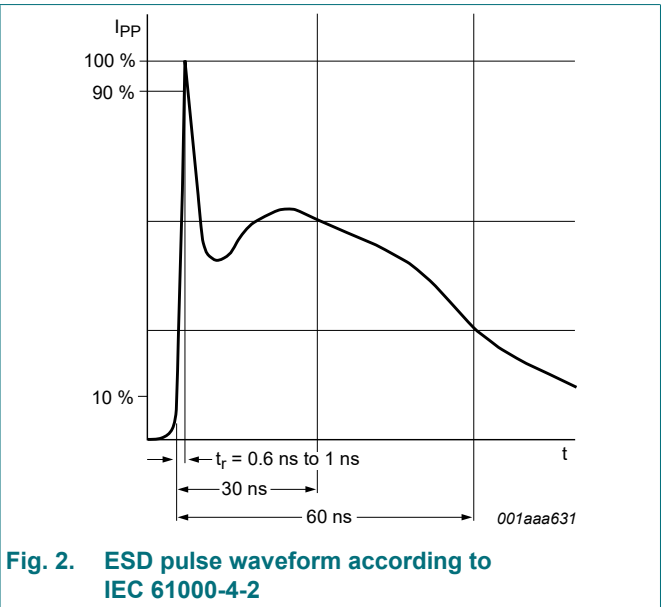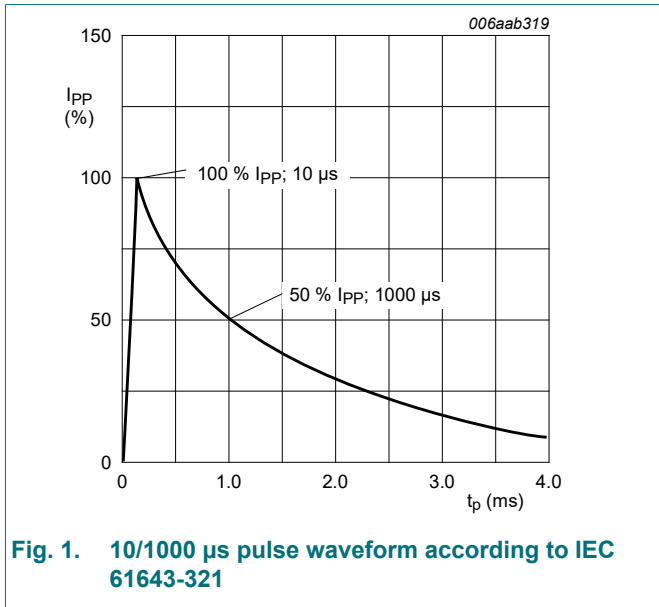

## 9. Characteristics



**Table 8. Characteristics per type;**

$T_{amb} = 25^{\circ}\text{C}$  unless otherwise specified.

Type number		Reverse standoff voltage $V_{RWM}$ (V)	Breakdown voltage $V_{BR}$ (V) at test current $I_T$			Reverse leakage current $I_{RM}$ at $V_{RWM}$ ( $\mu\text{A}$ ) [1]	Test current $I_T$ (mA)	Clamping voltage $V_{CL}$ (V)	
uni-directional	bi-directional		Max	Min	Typ			Max	Max
P6SMB8.2A	P6SMB8.2CA	7.02	7.79	8.20	8.61	200/400	10	12.1	50.4
P6SMB9.1A	P6SMB9.1CA	7.78	8.65	9.10	9.55	50/100	1	13.4	45.5
P6SMB10A	P6SMB10CA	8.55	9.50	10.0	10.5	10/20	1	14.5	42.1
P6SMB11A	P6SMB11CA	9.40	10.5	11.0	11.6	5/10	1	15.6	39.1
P6SMB12A	P6SMB12CA	10.20	11.4	12.0	12.6	5/10	1	16.7	36.5
P6SMB13A	P6SMB13CA	11.10	12.4	13.0	13.7	1	1	18.2	33.5
P6SMB15A	P6SMB15CA	12.80	14.3	15.0	15.8	1	1	21.2	28.8
P6SMB16A	P6SMB16CA	13.60	15.2	16.0	16.8	1	1	22.5	27.1
P6SMB18A	P6SMB18CA	15.30	17.1	18.0	18.9	1	1	25.5	24.2
P6SMB20A	P6SMB20CA	17.10	19.0	20.0	21.0	1	1	27.7	22.0
P6SMB22A	P6SMB22CA	18.80	20.9	22.0	23.1	1	1	30.6	19.9
P6SMB24A	P6SMB24CA	20.50	22.8	24.0	25.2	1	1	33.2	18.4
P6SMB27A	P6SMB27CA	23.10	25.7	27.0	28.4	1	1	37.5	16.3
P6SMB30A	P6SMB30CA	25.60	28.5	30.0	31.5	1	1	41.4	14.7
P6SMB33A	P6SMB33CA	28.20	31.4	33.0	34.7	1	1	45.7	13.3
P6SMB36A	P6SMB36CA	30.80	34.2	36.0	37.8	1	1	49.9	12.2
P6SMB39A	P6SMB39CA	33.30	37.1	39.0	41.0	1	1	53.9	11.3
P6SMB43A	P6SMB43CA	36.80	40.9	43.0	45.2	1	1	59.3	10.3
P6SMB47A	P6SMB47CA	40.20	44.7	47.0	49.4	1	1	64.8	9.4
P6SMB51A	P6SMB51CA	43.60	48.5	51.0	53.6	1	1	70.1	8.7
P6SMB56A	P6SMB56CA	47.80	53.2	56.0	58.8	1	1	77.0	7.9
P6SMB62A	P6SMB62CA	53.00	58.9	62.0	65.1	1	1	85.0	7.2
P6SMB68A	P6SMB68CA	58.10	64.6	68.0	71.4	1	1	92.0	6.6
P6SMB75A	P6SMB75CA	64.10	71.3	75.0	78.8	1	1	103.0	5.9
P6SMB82A	P6SMB82CA	70.10	77.9	82.0	86.1	1	1	113.0	5.4
P6SMB91A	P6SMB91CA	77.80	86.5	91.0	95.5	1	1	125.0	4.9
P6SMB100A	P6SMB100CA	85.50	95.00	100.0	105.0	1	1	137.0	4.5
P6SMB110A	P6SMB110CA	94.00	105.0	110.0	116.0	1	1	152.0	4.0
P6SMB120A	P6SMB120CA	102.00	114.0	120.0	126.0	1	1	165.0	3.7
P6SMB130A	P6SMB130CA	111.00	124.0	130.0	137.0	1	1	179.0	3.4
P6SMB150A	P6SMB150CA	128.00	143.0	150.0	158.0	1	1	207.0	2.9
P6SMB160A	P6SMB160CA	136.00	152.0	160.0	168.0	1	1	219.0	2.8
P6SMB170A	P6SMB170CA	145.00	162.0	170.0	179.0	1	1	234.0	2.6
P6SMB180A	P6SMB180CA	154.00	171.0	180.0	189.0	1	1	246.0	2.5
P6SMB200A	P6SMB200CA	171.00	190.0	200.0	210.0	1	1	274.0	2.2

Type number		Reverse standoff voltage $V_{RWM}$ (V)	Breakdown voltage $V_{BR}$ (V) at test current $I_T$			Reverse leakage current $I_{RM}$ at $V_{RWM}$ ( $\mu$ A) [1]	Test current $I_T$ (mA)	Clamping voltage $V_{CL}$ (V)	
uni-directional	bi-directional		Max	Min	Typ			Max	Max
P6SMB220A	P6SMB220CA	185.00	209.0	220.0	231.0	1	1	328.0	1.9
P6SMB250A	P6SMB250CA	214.00	237.0	250.0	263.0	1	1	344.0	1.8

[1]  $I_{RM}$  Max. is doubled for bi-directional type with  $V_{RWM} \leq 10.2$  V

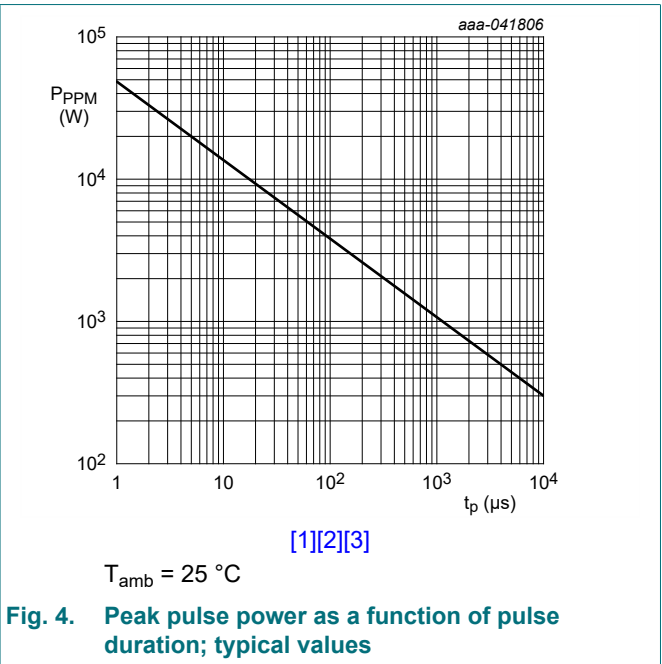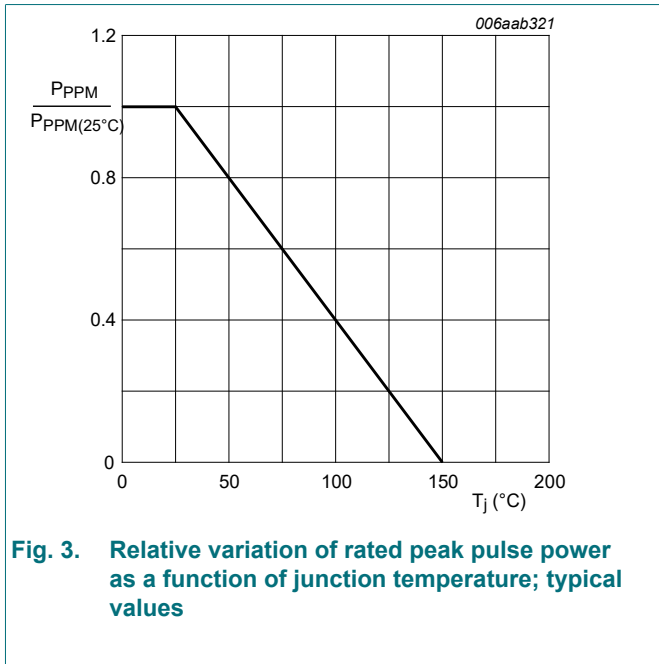

- [1] Peak pulse power derating curve derived from typical measured values using 8/20  $\mu$ s and 10/1000  $\mu$ s waveforms.
- [2] In accordance with IEC 61000-4-5 (8/20  $\mu$ s waveforms).
- [3] In accordance with IEC 61643-321 (10/1000  $\mu$ s waveforms).

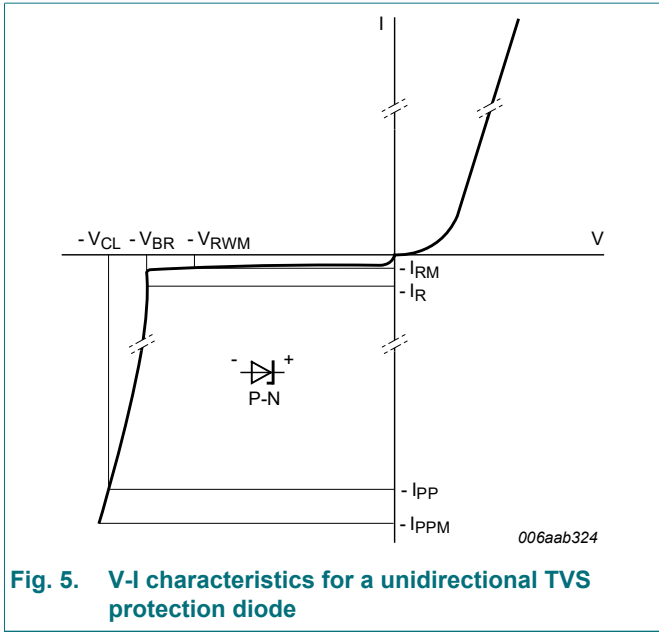


Fig. 5. V-I characteristics for a unidirectional TVS protection diode

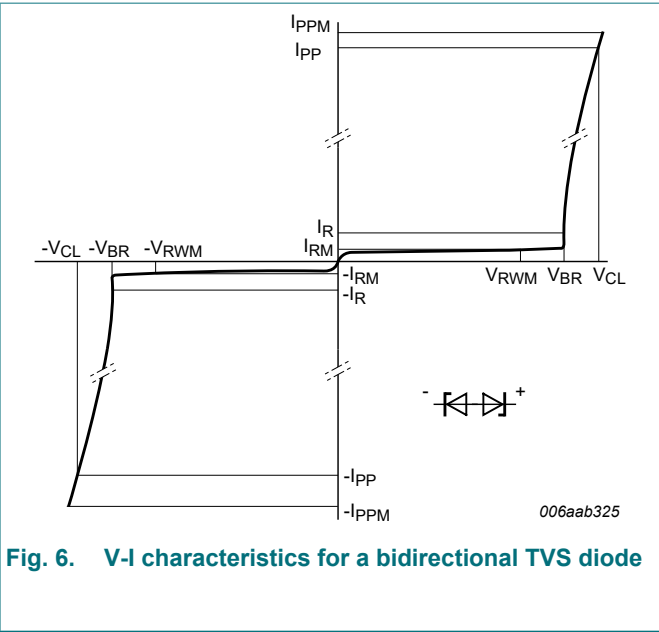


Fig. 6. V-I characteristics for a bidirectional TVS diode


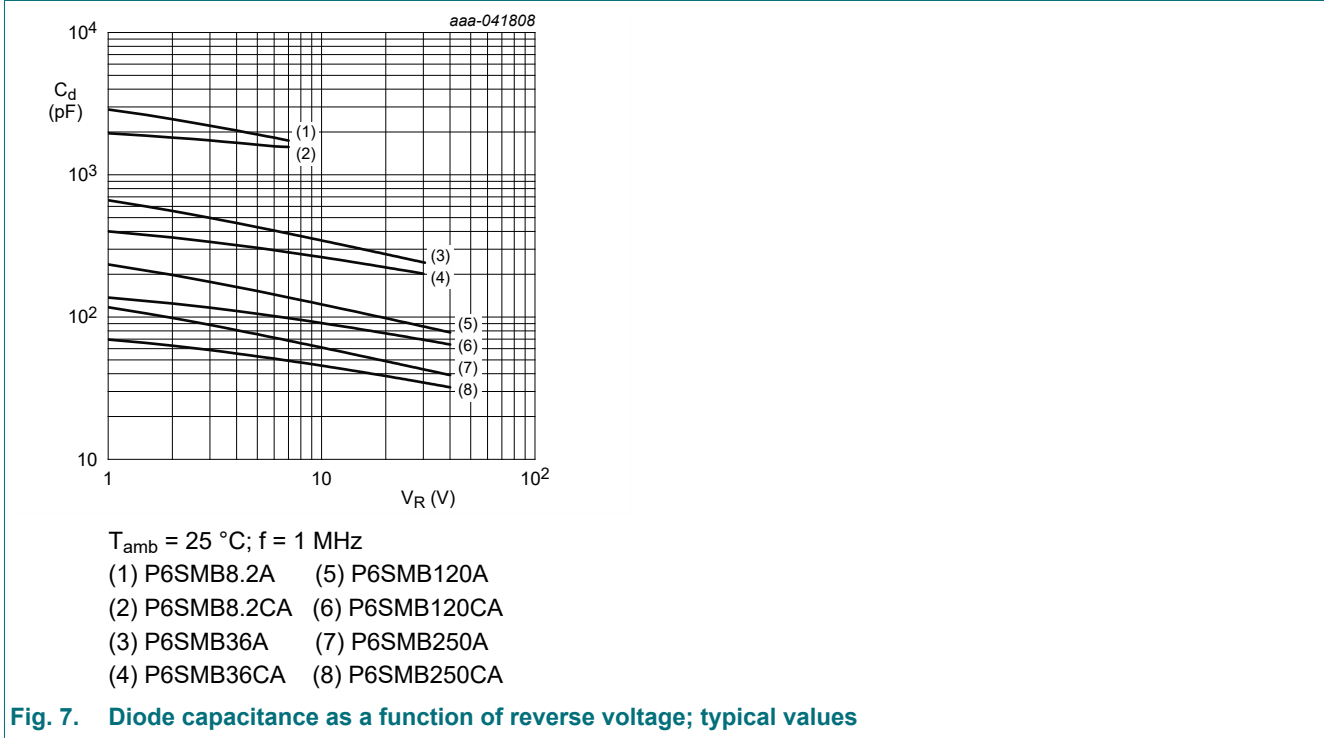


Fig. 7. Diode capacitance as a function of reverse voltage; typical values


### 10. Package outline



**Fig. 8. Package outline SMB (SOD1002-1)**

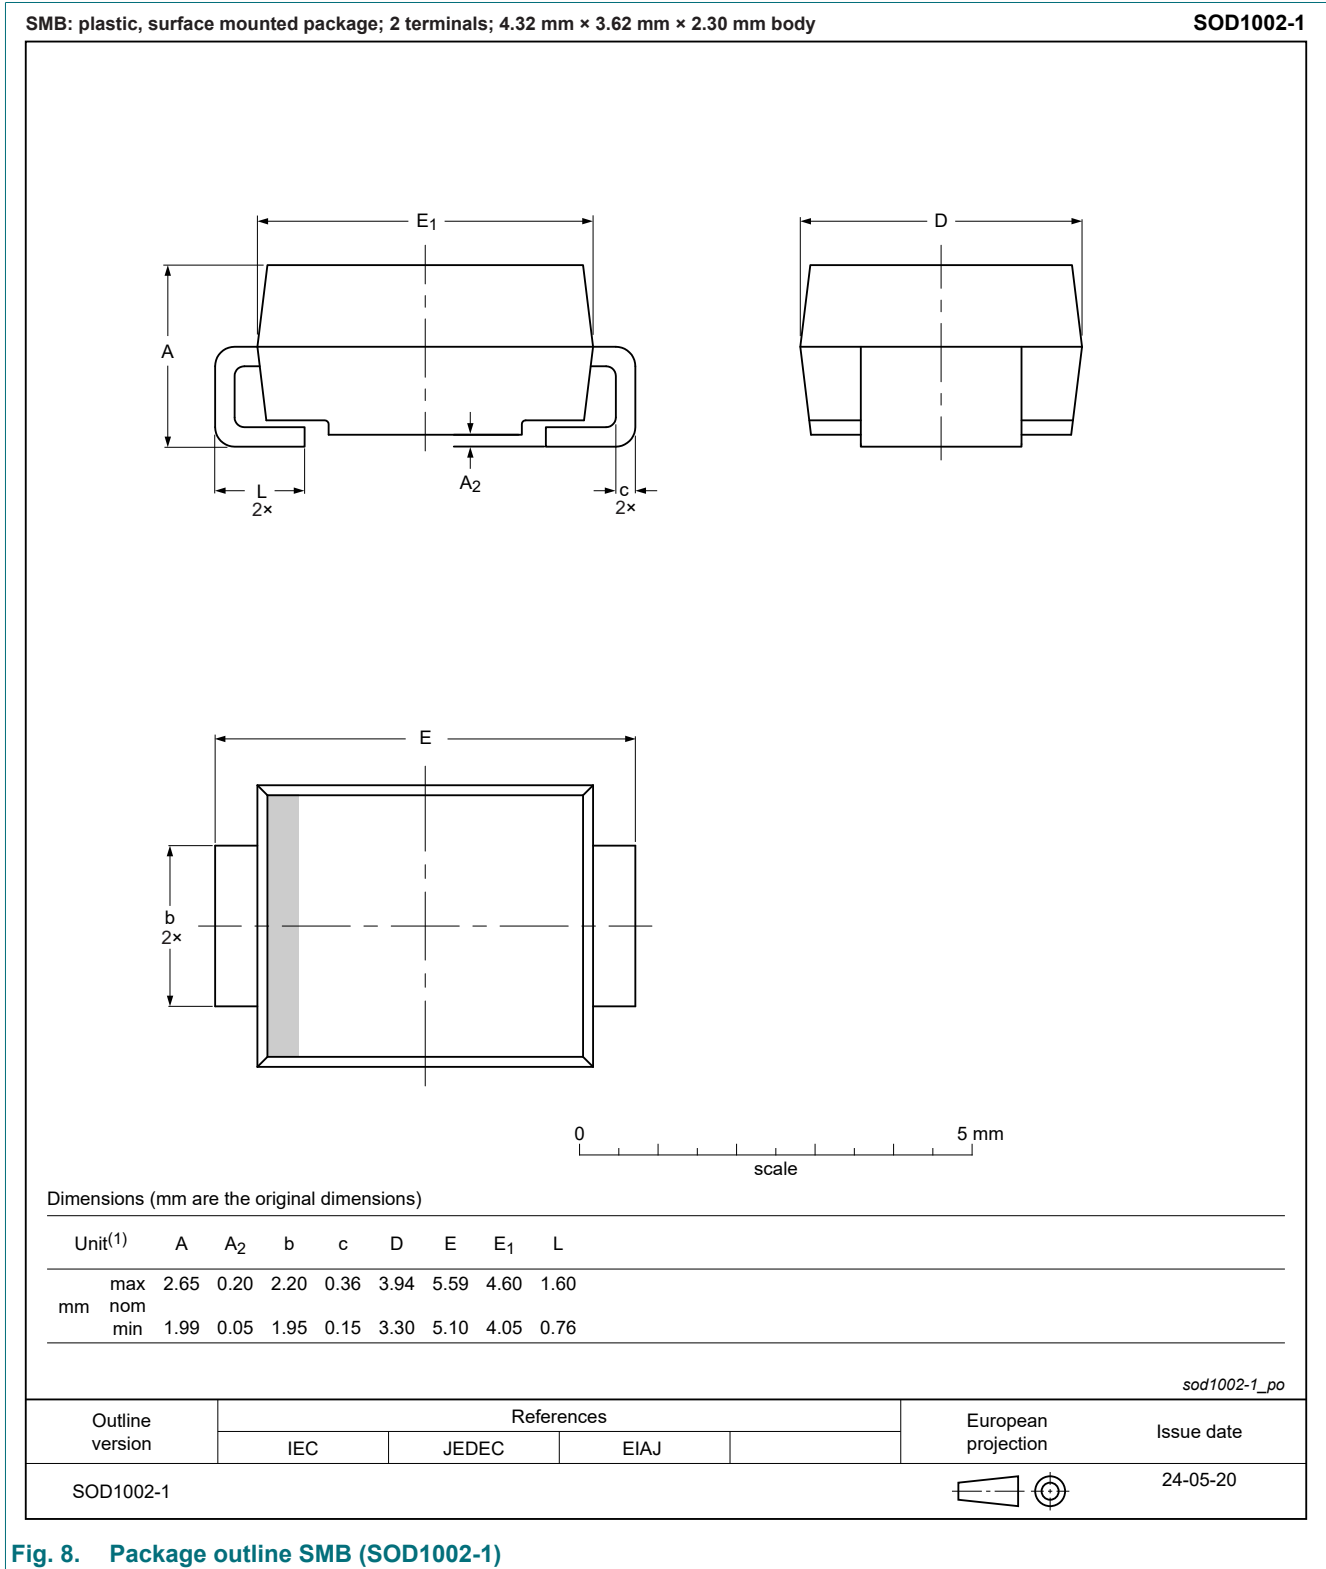

# 11. Soldering

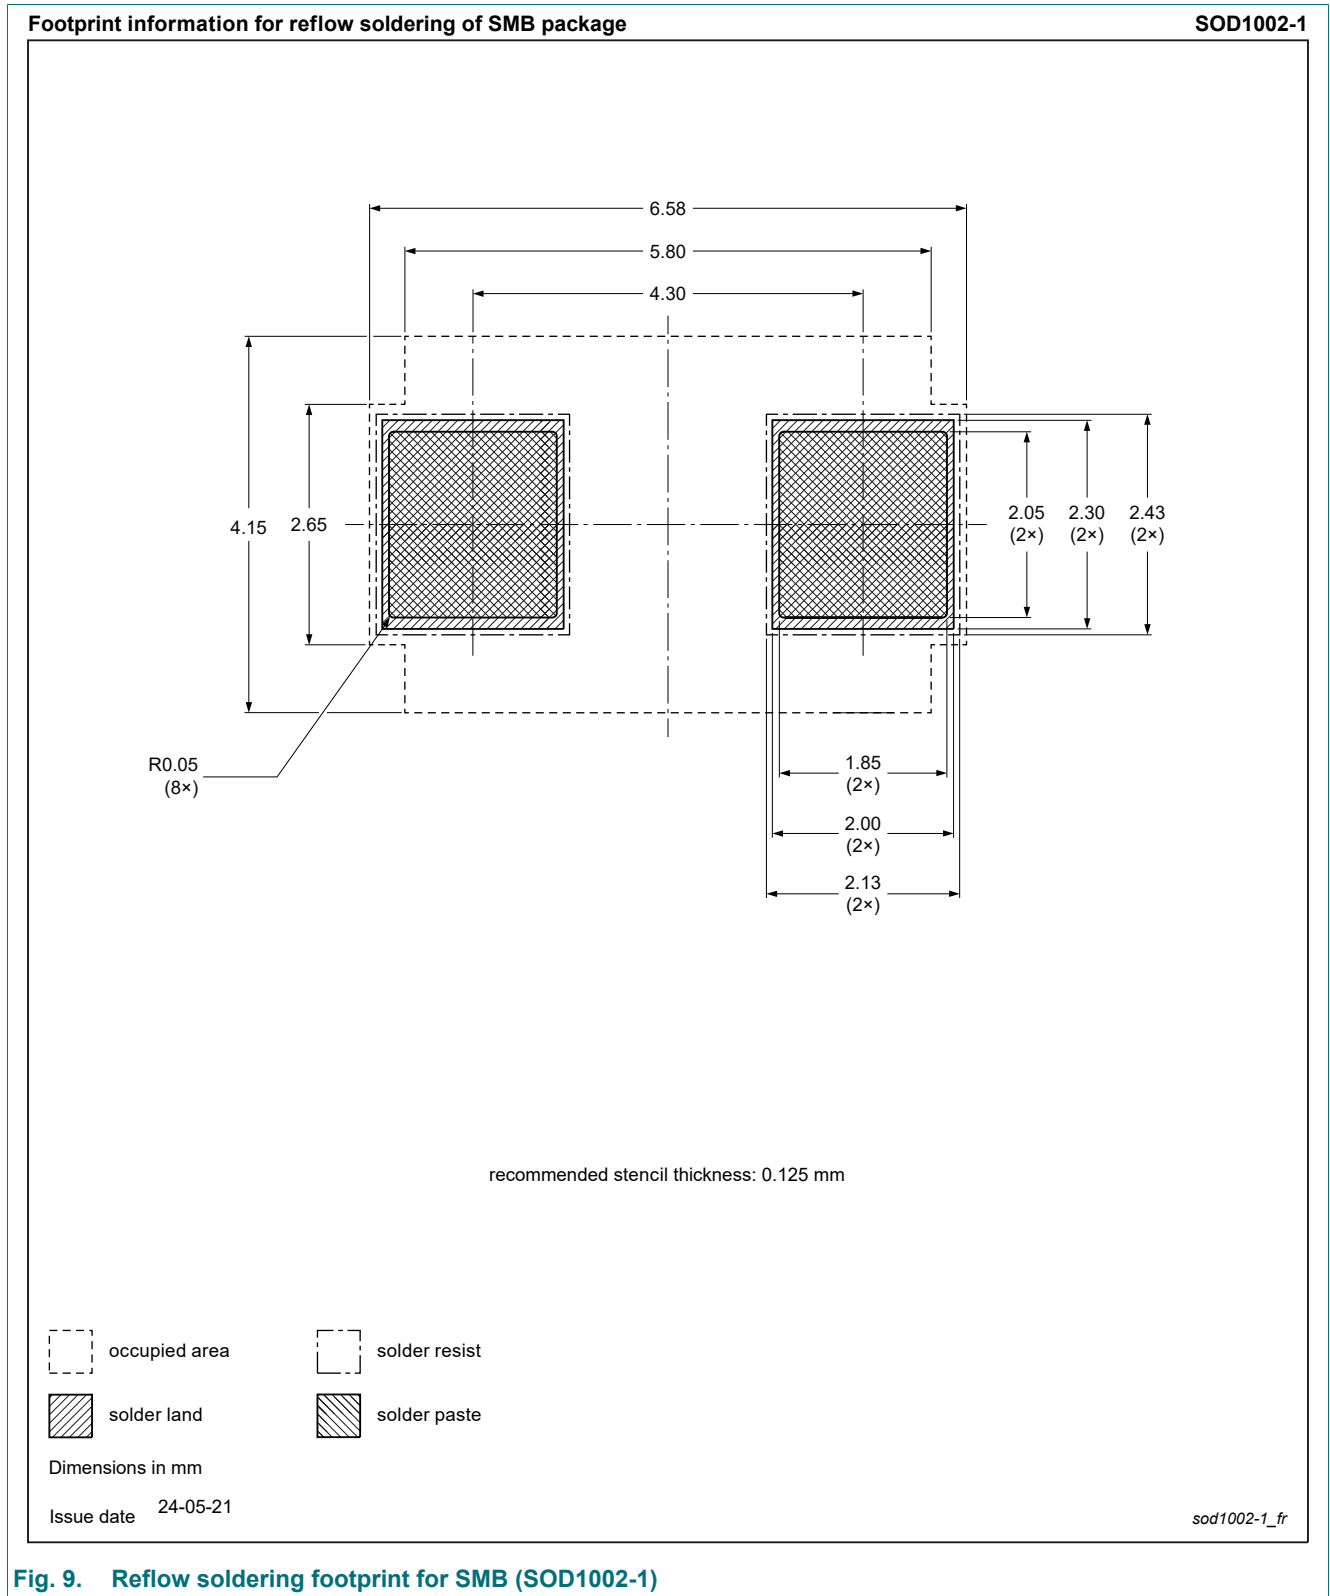

**Fig. 9. Reflow soldering footprint for SMB (SOD1002-1)**

## 12. Revision history

Table 9. Revision history

Data sheet ID	Release date	Data sheet status	Change notice	Supersedes
P6SMB_SER v.1	20250102	Product data sheet	-	-

## 13. Legal information

### Data sheet status

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- [1] Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the internet at <https://www.nexperia.com>.

### Definitions

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Short data sheet** — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

**Product specification** — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

### Disclaimers

**Limited warranty and liability** — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

**Right to make changes** — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

**Suitability for use** — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal

injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

**Limiting values** — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

**Terms and conditions of commercial sale** — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <http://www.nexperia.com/profile/terms>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

**Non-automotive qualified products** — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever customer uses the product for automotive applications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

### Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

## Contents

---

1. General description.....	1
2. Features and benefits.....	1
3. Applications.....	1
4. Quick reference data.....	1
5. Pinning information.....	2
6. Ordering information.....	2
7. Marking.....	2
8. Limiting values.....	4
9. Characteristics.....	5
10. Package outline.....	8
11. Soldering.....	9
12. Revision history.....	10
13. Legal information.....	11

---

© Nexperia B.V. 2025. All rights reserved

For more information, please visit: <http://www.nexperia.com>

For sales office addresses, please send an email to: [salesaddresses@nexperia.com](mailto:salesaddresses@nexperia.com)

Date of release: 2 January 2025

---