


> LfPAK88

Driving power-density to the next level

Providing a true alternative to D²PAK, Nexperia's LfPAK88 delivers industry leading power density in a truly innovative 8mm x 8mm footprint. Delivering 2x higher continuous current rating, ultimate thermal performance and reliability, and up to 60% space efficiency, making LfPAK88 the MOSFET of choice for the most challenging new designs. Available in both automotive AEC-Q101 and industrial grades.


Space saving footprint

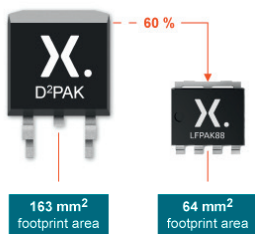


D²PAK Vs LfPAK88

- > 60% footprint reduction
- > 65% height reduction
- > 86% overall space reduction

Ultra Low On-Resistance

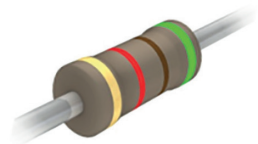

- > Latest low voltage superjunction technology
- > 0.5 mΩ @ 40 V
- > Copper clip technology gives low electrical and thermal resistance
- > Low $R_{DS(on)}$ without compromising SOA capability




Reliable & Manufacturable



- > Advanced package design exceeds 2x AEC-Q101
- > Recommended for automotive applications such as power steering, ABS braking, DC/DC conversion and LED lighting

High Current Rating

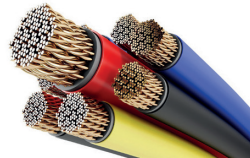

- > Up to 500 A continuous current rating
- > High transient robustness
- > 100% avalanche tested (100% tested)
- > Best-in-class linear mode (SOA) performance for in-rush & surge protection

nexperia

EFFICIENCY WINS.

AEC-Q101 LPAK88 Portfolio

Type number	V _{DS} max (V)	R _{DS(on)} max @ 10 V (mΩ)	I _D max @ 25 °C (A)	R _{th(j-mb)} typ (K/W)
BUK7S0R5-40H	40	0.55	500	0.35
BUK7S0R7-40H	40	0.7	425	0.35
BUK7S0R9-40H	40	0.9	375	0.35
BUK7S1R0-40H	40	1.0	325	0.35
BUK7S1R2-40H	40	1.2	300	0.45
BUK7S1R5-40H	40	1.5	260	0.54
BUK7S2R0-40H	40	2	190	0.72
BUK7S2R5-40H	40	2.51	140	0.97

Industrial LPAK88 Portfolio

Type number	V _{DS} max (V)	R _{DS(on)} max @ 10 V (mΩ)	I _D max @ 25 °C (A)	R _{th(j-mb)} typ (K/W)
PSMNR55-40SSH	40	0.55	500	0.35
PSMNR70-40SSH	40	0.7	425	0.35
PSMNR90-40SSH	40	0.9	375	0.35
PSMN1R0-40SSH	40	1.0	325	0.35

Compact footprint


- › D²PAK replacement
- › Low profile

Manufacturability & robustness

- › Flexible leads for temp cycling reliability
- › Compatible with SMD soldering and AOI

High performance silicon

- › 0.5 mΩ Trench 9 / NextPowerS3 40 V
- › Improved SOA

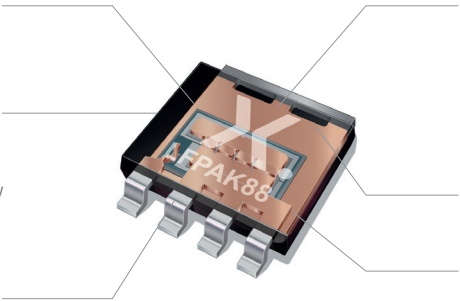

Copper clip

- › Tested high I_D max rating (500 A)
- › Low inductance (1 nH)
- › Current spreading
- › Low R_{DS(on)}

Low thermal resistance

- › Low R_{th(j-mb)} typ (0.35 K/W)

Qualification

- › AEC-Q101
- › 175 °C rating
- › MSL1
- › Halogen free

© 2021 Nexperia B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

Date of release:
May 2021