74ALVCH16827 20-bit buffer/line driver, non-inverting; 3-state Rev. 3 — 6 April 2018

Product data sheet

1 General description

The 74ALVCH16827 is a 20-bit non-inverting buffer/driver with 3-state outputs for bus oriented applications.

The 74ALVCH16827 consists of two 10-bit sections with separate output enable signals. For either 10-bit buffer section, the two output enable $(1\overline{OE0} \text{ and } 1\overline{OE1} \text{ or } 2\overline{OE0} \text{ and } 2\overline{OE1})$ inputs must both be active. If either output enable input is high, the outputs of that 10-bit buffer section are in high impedance state.

The 74ALVCH16827 has active bus hold circuitry which is provided to hold unused or floating data inputs at a valid logic level. This feature eliminates the need for external pull-up or pull-down resistors.

2 Features and benefits

- Wide supply voltage range of 1.2V to 3.6V
- CMOS low power consumption
- MultiByte flow-through standard pin-out architecture
- Low inductance multiple V_{CC} and GND pins for minimum noise and ground bounce
- Direct interface with TTL levels (2.7 V to 3.6 V)
- Bus hold on data inputs
- Output drive capability 50 Ω transmission lines at 85 °C
- Current drive ±24 mA at 3.0 V
- Complies with JEDEC standards:
 - JESD8-5 (2.3 V to 2.7 V)
 - JESD8B/JESD36 (2.7 V to 3.6 V)
- ESD protection:
 - HBM ANSI/ESDA/JEDEC JS-001 exceeds 2000 V
 - CDM JESD22-C101E exceeds 1000 V

3 Ordering information


Table 1. Ordering information

Type number	Package			
	Temperature range	Name	Description	Version
74ALVCH16827DGG	−40 °C to +85 °C	TSSOP56	plastic thin shrink small outline package; 56 leads; body width 6.1 mm	SOT364-1

nexperia

20-bit buffer/line driver, non-inverting; 3-state


4 Functional diagram

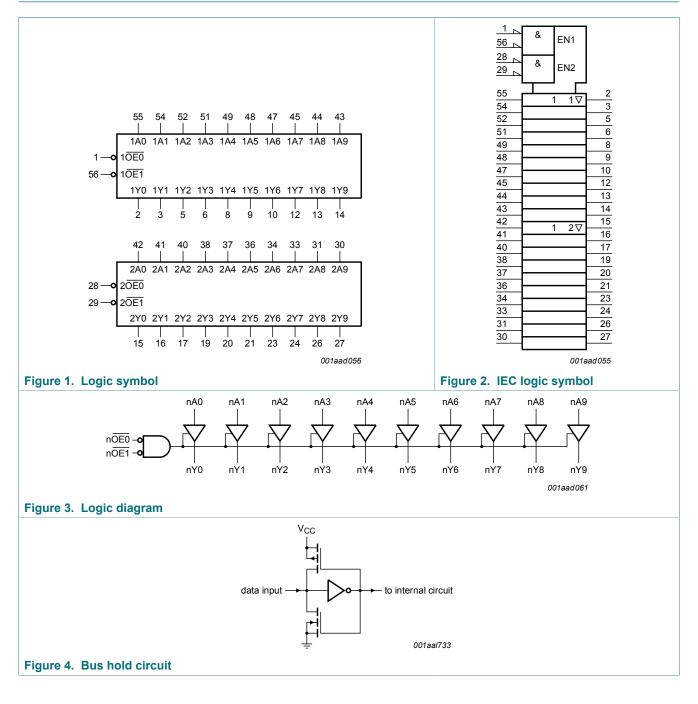

20-bit buffer/line driver, non-inverting; 3-state

5 Pinning information

5.1 Pinning

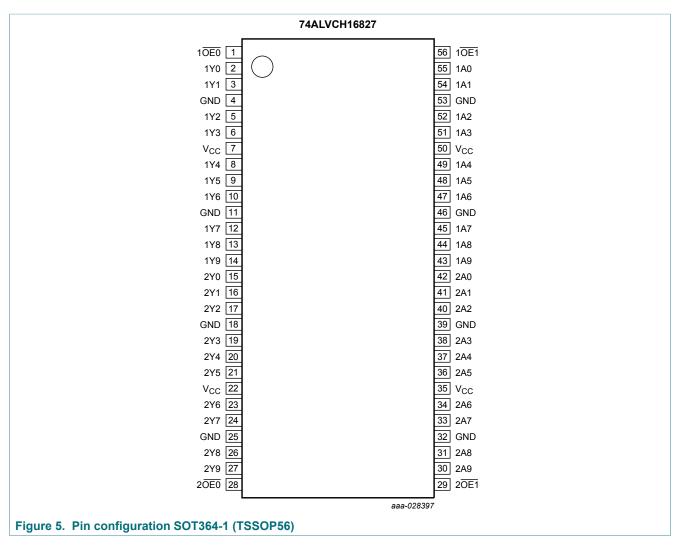

20-bit buffer/line driver, non-inverting; 3-state

5.2 Pin description

Table 2. Pin description		
Symbol	Pin	Description
1A0, 1A1, 1A2, 1A3, 1A4, 1A5, 1A6, 1A7, 1A8, 1A9	55, 54, 52, 51, 49, 48, 47, 45, 44, 43	data input
2A0, 2A1, 2A2, 2A3, 2A4, 2A5, 2A6, 2A7, 2A8, 2A9	42, 41, 40, 38, 37, 36, 34, 33, 31, 30	data input
1Y0, 1Y1, 1Y2, 1Y3, 1Y4, 1Y5, 1Y6, 1Y7, 1Y8, 1Y9	2, 3, 5, 6, 8, 9, 10, 12, 13, 14	data output
2Y0, 2Y1, 2Y2, 2Y3, 2Y4, 2Y5, 2Y6, 2Y7, 2Y8, 2Y9	15, 16, 17, 19, 20, 21, 23, 24, 26, 27	data output
1 <u>0E0</u> , 1 <u>0E1</u> , 2 <u>0E0</u> , 2 <u>0E1</u>	1, 56, 28, 29	output enable inputs (active-LOW)
GND	4, 11, 18, 25, 32, 39, 46, 53	ground (0 V)
V _{CC}	7, 22, 35, 50	positive voltage supply

Functional description 6

Table 3.	Function table	[1]
----------	----------------	-----

Operating mode	Input		Output
	nOEn	nAn	nYn
transparent	L	L	L
transparent	L	Н	Н
High-impedance	Н	X	Z

[1] X = don't care; Z = High-impedance OFF-state; H = HIGH voltage level; L = LOW voltage level.

Limiting values 7

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134). Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions		Min	Max	Unit
V _{CC}	supply voltage			-0.5	+4.6	V
VI	input voltage	data inputs	[1]	-0.5	V _{CC} + 0.5	V
		control inputs	[1]	-0.5	+4.6	V
Vo	output voltage		[1]	-0.5	V _{CC} + 0.5	V
I _{IK}	input clamping current	V _I < 0 V		-50	-	mA
I _{ОК}	output clamping current	$V_{\rm O}$ > $V_{\rm CC}$ or $V_{\rm O}$ < 0 V		-	±50	mA
I _{O (sink/source)}	output sink or source current	V_{O} = 0 V to V_{CC}		-	±50	mA
I _{CC}	supply current			-	100	mA
I _{GND}	ground current			-100	-	mA
T _{stg}	storage temperature			-65	+150	°C
P _{tot}	total power dissipation	$T_{amb} = -40 \degree C$ to +85 $\degree C$	[2]	-	600	mW

The input and output voltage ratings may be exceeded if the input and output current ratings are observed.
 For TSSOP56 packages: above 55 °C derate linearly with 8 mW/K.

20-bit buffer/line driver, non-inverting; 3-state

8 Recommended operating conditions

Symbol	Parameter	Conditions	Min	Мах	Unit
V _{CC}	supply voltage	V_{CC} = 2.5 V: for maximum speed performance at C _L = 30 pF	2.3	2.7	V
		V_{CC} = 3.3 V: for maximum speed performance at C _L = 50 pF	3.0	3.6	V
VI	input voltage		0	V _{CC}	V
Vo	output voltage		0	V _{CC}	V
T _{amb}	ambient temperature	in free air	-40	+85	°C
Δt/ΔV	input transition rise and	V _{CC} = 2.3 V to 3.0 V	0	20	ns/V
	fall rate	V _{CC} = 3.0 V to 3.6 V	0	10	ns/V

9 Static characteristics

Table 6. Static characteristics

At recommended operating conditions. $T_{amb} = -40$ °C to +85 °C; Voltages are referenced to GND (ground = 0 V).

Symbol	Parameter	Conditions	Min	Тур ^[1]	Max	Unit
VIH	HIGH-level input	V _{CC} = 2.3 to 2.7 V	1.7	1.2	-	V
	voltage	V _{CC} = 2.7 to 3.6 V	2.0	1.5	-	V
V _{IL}	LOW-level input	V _{CC} = 2.3 to 2.7 V	-	1.2	0.7	V
	voltage	V _{CC} = 2.7 to 3.6 V	-	1.5	0.8	V
V _{OH}	HIGH-level output	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	voltage	I_{O} = -100 µA; V_{CC} = 2.3 V to 3.6 V	V _{CC} - 0.2	V _{CC}	-	V
		I _O = -6 mA; V _{CC} = 2.3 V	V _{CC} - 0.3	V _{CC} - 0.08	-	V
		I _O = -12 mA; V _{CC} = 2.3 V	V _{CC} - 0.6	V _{CC} - 0.26	-	V
		I _O = -12 mA; V _{CC} = 2.7 V	V _{CC} - 0.5	V _{CC} - 0.14	-	V
		I _O = -12 mA; V _{CC} = 3.0 V	V _{CC} - 0.6	V _{CC} - 0.09	-	V
		I _O = -24 mA; V _{CC} = 3.0 V	V _{CC} - 1.0	V _{CC} - 0.28	-	V
V _{OL}	LOW-level output	$V_{I} = V_{IH} \text{ or } V_{IL}$				
	voltage	I_{O} = 100 µA; V_{CC} = 2.3 V to 3.6 V	-	GND	0.20	V
		I _O = 6 mA; V _{CC} = 2.3 V	-	0.07	0.40	V
		I _O = 12 mA; V _{CC} = 2.3 V	-	0.15	0.70	V
		I _O = 12 mA; V _{CC} = 2.7 V	-	0.14	0.40	V
		I _O = 24 mA; V _{CC} = 3.0 V	-	0.27	0.55	V
l _l	input leakage current	V_{I} = V_{CC} or GND; V_{CC} = 2.3 V to 3.6 V	-	0.1	5	μA
I _{BHL}	bus hold LOW	V _{CC} = 2.3 V; V _I = 0.7 V	45	-	-	μA
	current	V _{CC} = 3.0 V; V _I = 0.8 V	75	150	-	μA
I _{BHH}	bus hold HIGH	V _{CC} = 2.3 V; V _I = 1.7 V	-45	-	-	μA
	current	V _{CC} = 3.0 V; V _I = 2.0 V	-75	-175	-	μA

74ALVCH16827

Nexperia

74ALVCH16827

20-bit buffer/line driver, non-inverting; 3-state

Symbol	Parameter	Conditions	Min	Тур ^[1]	Max	Unit
I _{BHLO}	bus hold LOW overdrive current	V _{CC} = 3.6 V	500	-	-	μA
I _{BHHO}	bus hold HIGH overdrive current	V _{CC} = 3.6 V	-500	-	-	μA
I _{OZ}	OFF-state output current	V_{CC} = 2.3 V to 3.6 V; V _I = V _{IH} or V _{IL} ; V _O = V _{CC} or GND	-	0.1	10	μA
I _{CC}	supply current	V_{CC} = 2.3 to 3.6 V; V_I = V_{CC} or GND; I_O = 0 A	-	0.2	40	μA
ΔI _{CC}	additional supply current	$V_{I} = V_{CC} - 0.6 \text{ V}; I_{O} = 0 \text{ A};$ $V_{CC} = 2.3 \text{ V to } 3.6 \text{ V}$	-	150	750	μA
CI	input capacitance		-	5.0	-	pF

[1] All typical values are measured at T_{amb} = 25 °C.

10 Dynamic characteristics

Table 7. Dynamic characteristics

Voltages are referenced to GND (ground = 0 V). $T_{amb} = -40$ °C to +85 °C; For test circuit, see Figure 8.

Symbol	Parameter	Conditions	Min	Тур ^[1]	Max	Unit
t _{pd}	propagation delay	nAn to nYn; <u>Figure 6</u> ^[2]				
		V _{CC} = 2.3 V to 2.7 V	1.0	2.0	4.1	ns
		V _{CC} = 2.7 V	1.0	2.1	3.9	ns
		V _{CC} = 3.0 V to 3.6 V	1.0	2.0	3.4	ns
t _{en}	enable time	nOEn to nYn; Figure 7 ^[2]				
		V _{CC} = 2.3 V to 2.7 V	1.0	2.9	6.0	ns
		V _{CC} = 2.7 V	1.0	3.0	5.7	ns
		V _{CC} = 3.0 V to 3.6 V	1.0	2.5	4.7	ns
t _{dis}	disable time	nOEn to nYn; Figure 7 ^[2]				
		V _{CC} = 2.3 V to 2.7 V	1.2	2.1	5.6	ns
		V _{CC} = 2.7 V	1.3	3.1	4.9	ns
		V _{CC} = 3.0 V to 3.6 V	1.3	2.8	4.5	ns
C _{PD}	power dissipation	per buffer; V_I = GND to V_{CC} ^[3]				
	capacitance	outputs enabled	-	20	-	pF
		outputs disabled	-	3	-	pF

[1] Typical values are measured at T_{amb} = 25 $^\circ\text{C}$

Typical values for V_{CC} = 2.3 V to 2.7 V are measured at V_{CC} = 2.5 V Typical values for V_{CC} = 3.0 V to 3.6 V are measured at V_{CC} = 3.3 V

[2] t_{pd} is the same as t_{PHL} and t_{PLH} ; t_{en} is the same as t_{PZH} and t_{PZL} ; t_{dis} is the same as t_{PHZ} and t_{PLZ} . [3] C_{PD} is used to determine the dynamic power dissipation (P_D in μ W):

 $P_{D} = C_{PD} \times V_{CC}^{2} \times f_{i} \times N + \sum (C_{L} \times V_{CC}^{2} \times f_{o}) \text{ where:}$

f_i = input frequency in MHz;

fo = output frequency in MHz;

 C_L = output load capacitance in pF;


V_{CC} = supply voltage in V;

N = number of inputs switching;

 $\sum (C_L \times V_{CC}^2 \times f_0) = \text{sum of outputs.}$

20-bit buffer/line driver, non-inverting; 3-state

10.1 Waveforms and test circuit

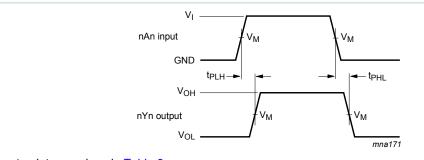

Measurement points are given in <u>Table 8</u>.

 V_{OL} and V_{OH} are typical voltage output levels that occur with the output load.

Figure 6. Input nAn to output nYn propagation delays

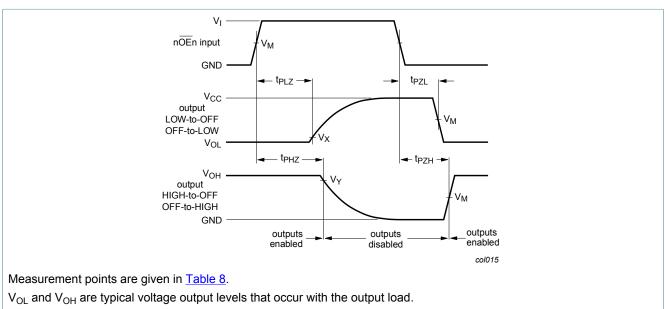


Figure 7. 3-state enable and disable times

Table 8. Measurement points


Supply voltage	Input		Output		
V _{cc}	VI	V _M	V _M	V _X	V _Y
2.3 V to 2.7 V	V _{CC}	0.5 x V _{CC}	0.5 x V _{CC}	V _{OL} + 0.15 V	V _{OH} - 0.15 V
2.7 V	2.7 V	1.5 V	1.5 V	V _{OL} + 0.3 V	V _{OH} - 0.3 V
3.0 V to 3.6 V	2.7 V	1.5 V	1.5 V	V _{OL} + 0.3 V	V _{OH} - 0.3 V

74ALVCH16827 Product data sheet

Nexperia

74ALVCH16827

20-bit buffer/line driver, non-inverting; 3-state

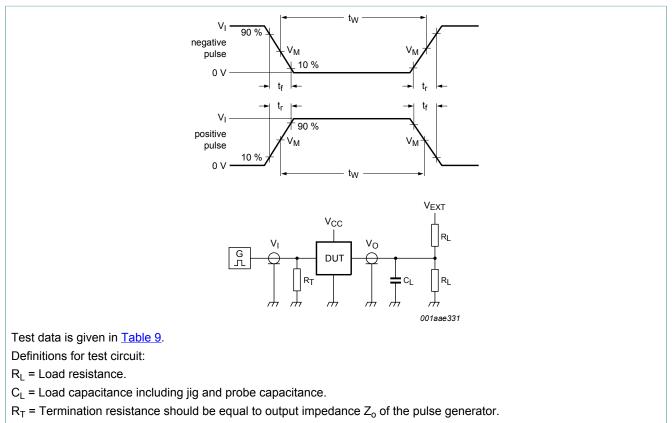

 V_{EXT} = External voltage for measuring switching times.

Figure 8. Test circuit for measuring switching times

Table 9. Test data

Supply voltage	Input		Load		V _{EXT}		
V _{cc}	VI	t _r , t _f	CL	R _L	t _{PLH} , t _{PHL}	t _{PLZ} , t _{PZL}	t _{PHZ} , t _{PZH}
2.3 V to 2.7 V	V _{CC}	≤ 2.0 ns	30 pF	500 Ω	open	2 x V _{CC}	GND
2.7 V	2.7 V	≤ 2.5 ns	50 pF	500 Ω	open	2 x V _{CC}	GND
3.0 V to 3.6 V	2.7 V	≤ 2.5 ns	50 pF	500 Ω	open	2 x V _{CC}	GND

20-bit buffer/line driver, non-inverting; 3-state

11 Package outline

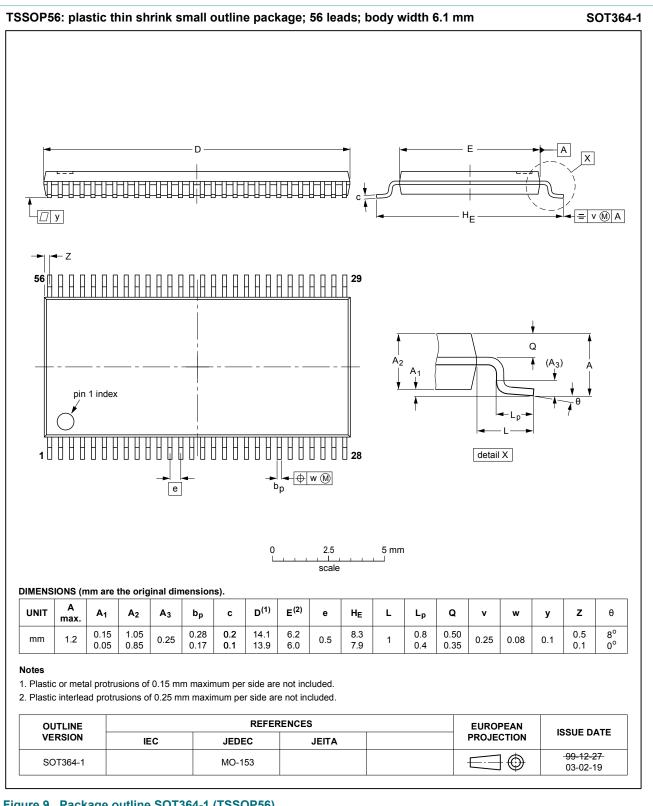


Figure 9. Package outline SOT364-1 (TSSOP56)

© Nexperia B.V. 2018. All rights reserved.

20-bit buffer/line driver, non-inverting; 3-state

12 Abbreviations

Description Bipolar Complementary Metal Oxide Semiconductor
ipolar Complementary Metal Oxide Semiconductor
Charged Device Model
Complementary Metal-Oxide Semiconductor
Device Under Test
ElectroStatic Discharge
luman Body Model
ransistor-Transistor Logic
)e Ele

13 Revision history

Table 11. Revision history							
Document ID	Release date	Data sheet status	Change notice	Supersedes			
74ALVCH16827 v.3	20180406	Product data sheet	-	74ALVCH16827 v.2			
Modifications:	 The format of this data sheet has been redesigned to comply with the identity guidelines of Nexperia. Legal texts have been adapted to the new company name where appropriate. 						
74ALVCH16827 v.2	19980727	Product specification	-	74ALVCH16827 v.1			
74ALVCH16827 v.1	19980727	Product specification	-	-			

20-bit buffer/line driver, non-inverting; 3-state

14 Legal information

14.1 Data sheet status

Document status ^{[1][2]}	Product status ^[3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

Please consult the most recently issued document before initiating or completing a design. [1]

The term 'short data sheet' is explained in section "Definitions".

[2] [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

14.2 Definitions

Draft — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

14.3 Disclaimers

Limited warranty and liability - Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia. In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory. Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia

Right to make changes - Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof.

Suitability for use - Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of an Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk.

Applications — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification. Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products. Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale - Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at http://www.nexperia.com/profile/terms, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer

No offer to sell or license - Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

Export control — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

20-bit buffer/line driver, non-inverting; 3-state

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications. In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications beyond Nexperia's specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer

design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia's product specifications.

Translations — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

14.4 Trademarks

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

Nexperia

74ALVCH16827

20-bit buffer/line driver, non-inverting; 3-state

Contents

General description	1
Features and benefits	1
Ordering information	1
Functional diagram	2
Pinning information	3
Pinning	
Pin description	4
Functional description	
Limiting values	4
Recommended operating conditions	5
Static characteristics	5
Dynamic characteristics	6
Waveforms and test circuit	7
Package outline	
Abbreviations	10
Revision history	10
Legal information	11
	Features and benefits Ordering information Functional diagram Pinning information Pin description Functional description Limiting values Recommended operating conditions Static characteristics Dynamic characteristics Waveforms and test circuit Package outline Abbreviations Revision history

Please be aware that important notices concerning this document and the product(s) described herein, have been included in section 'Legal information'.

© Nexperia B.V. 2018.

All rights reserved.

For more information, please visit: http://www.nexperia.com For sales office addresses, please send an email to: salesaddresses@nexperia.com

Date of release: 6 April 2018 Document identifier: 74ALVCH16827