



Table 1. Quick reference data ...continued

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Dynamic	characteristics					
$Q_{GD}$	gate-drain charge	$V_{GS} = 4.5 \text{ V}; I_D = 20 \text{ A};$ $V_{DS} = 15 \text{ V}; \text{ see } \frac{\text{Figure 14}}{\text{Figure 15}};$	-	2.5	-	nC
Q <sub>G(tot)</sub>	total gate charge	$V_{GS} = 4.5 \text{ V}; I_D = 20 \text{ A};$ $V_{DS} = 15 \text{ V}; \text{ see } \frac{\text{Figure 14}}{\text{Figure 15}};$	-	7.9	-	nC

## 2. Pinning information

**Table 2. Pinning information** 

	•			
Pin	Symbol	Description	Simplified outline	Graphic symbol
1	S	source		
2	S	source	mb (	D
3	S	source		
4	G	gate		
mb	D	mounting base; connected to drain	1 2 3 4	mbb076 S
			SOT669 (LFPAK; Power-SO8)	

## 3. Ordering information

Table 3. Ordering information

Type number	Package		
	Name	Description	Version
PSMN7R0-30YLC	LFPAK; Power-SO8	plastic single-ended surface-mounted package; 4 leads	SOT669



## 4. Limiting values

Table 4. Limiting values

In accordance with the Absolute Maximum Rating System (IEC 60134).

Symbol	Parameter	Conditions	Min	Max	Unit
$V_{DS}$	drain-source voltage	25 °C ≤ T <sub>j</sub> ≤ 175 °C	-	30	V
$V_{DGR}$	drain-gate voltage	25 °C $\leq$ T <sub>j</sub> $\leq$ 175 °C; R <sub>GS</sub> = 20 k $\Omega$	-	30	V
$V_{GS}$	gate-source voltage		-20	20	V
I <sub>D</sub>	drain current	$V_{GS} = 10 \text{ V; } T_{mb} = 25 \text{ °C; see } \frac{\text{Figure 1}}{\text{Model}}$	-	61	Α
		$V_{GS} = 10 \text{ V; } T_{mb} = 100 \text{ °C; see } \frac{\text{Figure 1}}{}$	-	43	Α
I <sub>DM</sub>	peak drain current	pulsed; $t_p \le 10 \mu s$ ; $T_{mb} = 25 \text{ °C}$ ; see Figure 4	-	245	Α
P <sub>tot</sub>	total power dissipation	T <sub>mb</sub> = 25 °C; see <u>Figure 2</u>	-	48	W
T <sub>stg</sub>	storage temperature		-55	175	°C
Tj	junction temperature		-55	175	°C
T <sub>sld(M)</sub>	peak soldering temperature		-	260	°C
V <sub>ESD</sub>	electrostatic discharge voltage	MM (JEDEC JESD22-A115)	190	-	V
Source-drai	n diode				
Is	source current	T <sub>mb</sub> = 25 °C	-	44	Α
I <sub>SM</sub>	peak source current	pulsed; $t_p \le 10 \ \mu s$ ; $T_{mb} = 25 \ ^{\circ}C$	-	245	Α
Avalanche r	uggedness				
E <sub>DS(AL)S</sub>	non-repetitive drain-source avalanche energy	$V_{GS}$ = 10 V; $T_{j(init)}$ = 25 °C; $I_D$ = 61 A; $V_{sup} \le$ 30 V; $R_{GS}$ = 50 Ω; unclamped; see Figure 3	-	15	mJ






Fig 1. Continuous drain current as a function of mounting base temperature




ig 2. Normalized total power dissipation as a function of mounting base temperature



(1)  $T_{j (init)} = 25^{\circ}C$ ; (2)  $T_{j (init)} = 100^{\circ}C$ 

Fig 3. Single pulse avalanche rating; avalanche current as a function of avalanche time

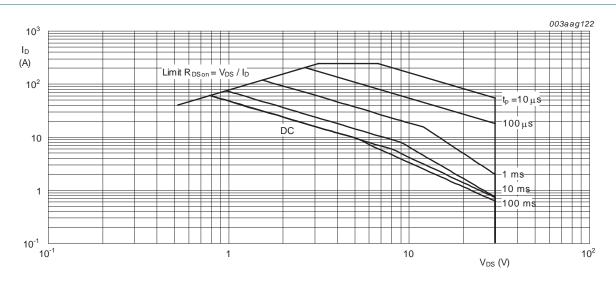

 $T_{mb} = 25$ °C;  $I_{DM}$  is a single pulse

Fig 4. Safe operating area; continuous and peak drain currents as a function of drain-source voltage

## 5. Thermal characteristics

#### Table 5. Thermal characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
R <sub>th(j-mb)</sub>	thermal resistance from junction to mounting base	see Figure 5	-	2.9	3.13	K/W



**Product data sheet** 

## 6. Characteristics

Table 6. Characteristics

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
Static chara		Conditions	141111	יאָף	max	Oilit
V <sub>(BR)DSS</sub>	drain-source breakdown	I <sub>D</sub> = 250 μA; V <sub>GS</sub> = 0 V; T <sub>i</sub> = 25 °C	30	-	-	V
* (RK)D22	voltage	$I_D = 250 \mu\text{A};  V_{GS} = 0  \text{V};  T_j = 250 \text{°C}$	27	-	_	V
V <sub>GS(th)</sub>	gate-source threshold	$I_D = 1 \text{ mA}; V_{DS} = V_{GS}; T_j = 25 \text{ °C};$	1.05	1.58	1.95	V
	voltage	see Figure 10 $I_D = 10 \text{ mA}$ ; $V_{DS} = V_{GS}$ ; $T_j = 150 \text{ °C}$ ; see Figure 11	0.5	-	-	V
		$I_D$ = 1 mA; $V_{DS}$ = $V_{GS}$ ; $T_j$ = -55 °C; see <u>Figure 11</u>	-	-	2.35	V
I <sub>DSS</sub>	drain leakage current	$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	1	μΑ
		$V_{DS} = 30 \text{ V}; V_{GS} = 0 \text{ V}; T_j = 150 \text{ °C}$	-	-	100	μΑ
I <sub>GSS</sub>	gate leakage current	$V_{GS} = 16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nA
		$V_{GS} = -16 \text{ V}; V_{DS} = 0 \text{ V}; T_j = 25 \text{ °C}$	-	-	100	nA
R <sub>DSon</sub> drain-source on-state resistance		$V_{GS} = 4.5 \text{ V}; I_D = 20 \text{ A}; T_j = 25 \text{ °C};$ see <u>Figure 12</u>	-	7.6	8.9	mΩ
		$V_{GS} = 4.5 \text{ V}; I_D = 20 \text{ A}; T_j = 150 °C;$ see <u>Figure 12</u> ; see <u>Figure 13</u>	-	-	14.7	mΩ
		$V_{GS} = 10 \text{ V}; I_D = 20 \text{ A}; T_j = 25 \text{ °C};$ see <u>Figure 12</u>	-	6	7.1	mΩ
	$V_{GS} = 10 \text{ V}$ ; $I_D = 20 \text{ A}$ ; $T_j = 150 \text{ °C}$ ; see <u>Figure 12</u> ; see <u>Figure 13</u>	-	-	11.8	mΩ	
$R_{G}$	gate resistance	f = 1 MHz	-	2.2	4.4	Ω
Dynamic ch	naracteristics					
Q <sub>G(tot)</sub>	total gate charge	$I_D = 20 \text{ A}$ ; $V_{DS} = 15 \text{ V}$ ; $V_{GS} = 10 \text{ V}$ ; see Figure 14; see Figure 15	-	16	-	nC
		$I_D = 20 \text{ A}$ ; $V_{DS} = 15 \text{ V}$ ; $V_{GS} = 4.5 \text{ V}$ ; see Figure 14; see Figure 15	-	7.9	-	nC
		$I_D = 0 \text{ A}$ ; $V_{DS} = 0 \text{ V}$ ; $V_{GS} = 10 \text{ V}$ ; see <u>Figure 15</u>	-	14	-	nC
$Q_{GS}$	gate-source charge	$I_D = 20 \text{ A}; V_{DS} = 15 \text{ V}; V_{GS} = 4.5 \text{ V};$	-	2.7	-	nC
Q <sub>GS(th)</sub>	pre-threshold gate-source charge	see <u>Figure 14</u> ; see <u>Figure 15</u>	-	1.7	-	nC
Q <sub>GS(th-pl)</sub>	post-threshold gate-source charge		-	1	-	nC
Q <sub>GD</sub>	gate-drain charge		-	2.5	-	nC
V <sub>GS(pl)</sub>	gate-source plateau voltage	$I_D = 20 \text{ A}$ ; $V_{DS} = 15 \text{ V}$ ; see <u>Figure 14</u> ; see <u>Figure 15</u>	-	2.77	-	V
C <sub>iss</sub>	input capacitance	V <sub>DS</sub> = 15 V; V <sub>GS</sub> = 0 V; f = 1 MHz;	-	1057	-	pF
C <sub>oss</sub>	output capacitance	$T_j = 25$ °C; see Figure 16	-	235	-	pF
C <sub>rss</sub>	reverse transfer capacitance		-	77	-	pF

Table 6. Characteristics ... continued

Symbol	Parameter	Conditions	Min	Тур	Max	Unit
t <sub>d(on)</sub>	turn-on delay time	$V_{DS} = 15 \text{ V}; R_L = 0.75 \Omega; V_{GS} = 4.5 \text{ V};$	-	15	-	ns
t <sub>r</sub>	rise time	$R_{G(ext)} = 4.7 \Omega$	-	18	-	ns
t <sub>d(off)</sub>	turn-off delay time		-	20	-	ns
t <sub>f</sub>	fall time		-	7.5	-	ns
Q <sub>oss</sub>	output charge	$V_{GS} = 0 \text{ V}; V_{DS} = 15 \text{ V}; f = 1 \text{ MHz};$ $T_j = 25 \text{ °C}$	-	6.4	-	nC
Source-drai	n diode					
$V_{SD}$	source-drain voltage	$I_S = 20 \text{ A}; V_{GS} = 0 \text{ V}; T_j = 25 ^{\circ}\text{C};$ see Figure 17	-	0.86	1.1	V
t <sub>rr</sub>	reverse recovery time	$I_S = 20 \text{ A}; dI_S/dt = -100 \text{ A/}\mu\text{s};$	-	25	-	ns
Q <sub>r</sub>	recovered charge	$V_{GS} = 0 \text{ V}; V_{DS} = 15 \text{ V}$	-	13	-	nC
t <sub>a</sub>	reverse recovery rise time	$V_{GS} = 0 \text{ V}; I_S = 20 \text{ A};$	-	16	-	ns
t <sub>b</sub>	reverse recovery fall time	$dl_S/dt = -100 A/\mu s; V_{DS} = 15 V;$ see Figure 18	-	9	-	ns






Fig 6. Output characteristics; drain current as a function of drain-source voltage; typical values



 $I_J - I_J = I_J$ 

Fig 7. Drain-source on-state resistance as a function of gate-source voltage; typical values

**Product data sheet** 



Forward transconductance as a function of Fig 8. drain current; typical values





Fig 10. Sub-threshold drain current as a function of gate-source voltage



 $V_{DS} = 10V$ 

Fig 9. Transfer characteristics; drain current as a function of gate-source voltage; typical values




Fig 11. Gate-source threshold voltage as a function of junction temperature





Fig 12. Drain-source on-state resistance as a function of drain current; typical values



003aaa508

Fig 14. Gate charge waveform definitions





Fig 13. Normalized drain-source on-state resistance factor as a function of junction temperature



 $T_j = 25^{\circ}C; \ I_D = 20A$ 

Fig 15. Gate-source voltage as a function of gate charge; typical values




Fig 16. Input, output and reverse transfer capacitances as a function of drain-source voltage; typical values




Fig 17. Source current as a function of source-drain voltage; typical values





Fig 18. Reverse recovery timing definition

**Product data sheet** 

## Package outline

#### Plastic single-ended surface-mounted package (LFPAK; Power-SO8); 4 leads

**SOT669** 

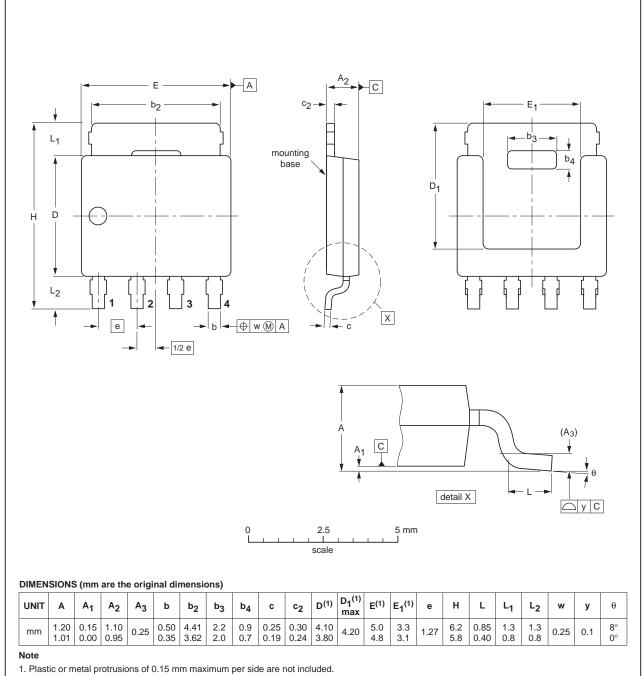

OUTLINE		REFER	ENCES	EUROPEAN	ISSUE DATE
VERSION	IEC	JEDEC	JEITA	PROJECTION	ISSUE DATE
SOT669		MO-235			<del>06-03-16</del> 11-03-25

Fig 19. Package outline SOT669 (LFPAK; Power-SO8)

PSMN7R0-30YLC All information provided in this document is subject to legal disclaimers.

## 8. Revision history

### Table 7. Revision history

Document ID	Release date	Data sheet status	Change notice	Supersedes
PSMN7R0-30YLC v.2	20110901	Product data sheet	-	PSMN7R0-30YLC v.1
Modifications:  • Status changed from objective to product.				
	<ul> <li>Various changes to</li> </ul>	content.		
PSMN7R0-30YLC v.1	20110711	Objective data sheet	-	-

## 9. Legal information

#### **Data sheet status**

Document status [1][2]	Product status [3]	Definition
Objective [short] data sheet	Development	This document contains data from the objective specification for product development.
Preliminary [short] data sheet	Qualification	This document contains data from the preliminary specification.
Product [short] data sheet	Production	This document contains the product specification.

- Please consult the most recently issued document before initiating or completing a design.
- [2] The term 'short data sheet' is explained in section "Definitions".
- [3] The product status of device(s) described in this document may have changed since this document was published and may differ in case of multiple devices. The latest product status information is available on the Internet at URL http://www.nexperia.com.

#### **Definitions**

**Preview** — The document is a preview version only. The document is still subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

**Draft** — The document is a draft version only. The content is still under internal review and subject to formal approval, which may result in modifications or additions. Nexperia does not give any representations or warranties as to the accuracy or completeness of information included herein and shall have no liability for the consequences of use of such information.

Short data sheet — A short data sheet is an extract from a full data sheet with the same product type number(s) and title. A short data sheet is intended for quick reference only and should not be relied upon to contain detailed and full information. For detailed and full information see the relevant full data sheet, which is available on request via the local Nexperia sales office. In case of any inconsistency or conflict with the short data sheet, the full data sheet shall prevail.

Product specification — The information and data provided in a Product data sheet shall define the specification of the product as agreed between Nexperia and its customer, unless Nexperia and customer have explicitly agreed otherwise in writing. In no event however, shall an agreement be valid in which the Nexperia product is deemed to offer functions and qualities beyond those described in the Product data sheet.

#### **Disclaimers**

Limited warranty and liability — Information in this document is believed to be accurate and reliable. However, Nexperia does not give any representations or warranties, expressed or implied, as to the accuracy or completeness of such information and shall have no liability for the consequences of use of such information. Nexperia takes no responsibility for the content in this document if provided by an information source outside of Nexperia.

In no event shall Nexperia be liable for any indirect, incidental, punitive, special or consequential damages (including - without limitation - lost profits, lost savings, business interruption, costs related to the removal or replacement of any products or rework charges) whether or not such damages are based on tort (including negligence), warranty, breach of contract or any other legal theory.

Notwithstanding any damages that customer might incur for any reason whatsoever, Nexperia's aggregate and cumulative liability towards customer

for the products described herein shall be limited in accordance with the Terms and conditions of commercial sale of Nexperia.

Right to make changes — Nexperia reserves the right to make changes to information published in this document, including without limitation specifications and product descriptions, at any time and without notice. This document supersedes and replaces all information supplied prior to the publication hereof

Suitability for use — Nexperia products are not designed, authorized or warranted to be suitable for use in life support, life-critical or safety-critical systems or equipment, nor in applications where failure or malfunction of a Nexperia product can reasonably be expected to result in personal injury, death or severe property or environmental damage. Nexperia and its suppliers accept no liability for inclusion and/or use of Nexperia products in such equipment or applications and therefore such inclusion and/or use is at the customer's own risk

**Quick reference data** — The Quick reference data is an extract of the product data given in the Limiting values and Characteristics sections of this document, and as such is not complete, exhaustive or legally binding.

**Applications** — Applications that are described herein for any of these products are for illustrative purposes only. Nexperia makes no representation or warranty that such applications will be suitable for the specified use without further testing or modification.

Customers are responsible for the design and operation of their applications and products using Nexperia products, and Nexperia accepts no liability for any assistance with applications or customer product design. It is customer's sole responsibility to determine whether the Nexperia product is suitable and fit for the customer's applications and products planned, as well as for the planned application and use of customer's third party customer(s). Customers should provide appropriate design and operating safeguards to minimize the risks associated with their applications and products.

Nexperia does not accept any liability related to any default, damage, costs or problem which is based on any weakness or default in the customer's applications or products, or the application or use by customer's third party customer(s). Customer is responsible for doing all necessary testing for the customer's applications and products using Nexperia products in order to avoid a default of the applications and the products or of the application or use by customer's third party customer(s). Nexperia does not accept any liability in this respect.

Limiting values — Stress above one or more limiting values (as defined in the Absolute Maximum Ratings System of IEC 60134) will cause permanent damage to the device. Limiting values are stress ratings only and (proper) operation of the device at these or any other conditions above those given in the Recommended operating conditions section (if present) or the Characteristics sections of this document is not warranted. Constant or repeated exposure to limiting values will permanently and irreversibly affect the quality and reliability of the device.

Terms and conditions of commercial sale — Nexperia products are sold subject to the general terms and conditions of commercial sale, as published at <a href="http://www.nexperia.com/profile/terms">http://www.nexperia.com/profile/terms</a>, unless otherwise agreed in a valid written individual agreement. In case an individual agreement is concluded only the terms and conditions of the respective agreement shall apply. Nexperia hereby expressly objects to applying the customer's general terms and conditions with regard to the purchase of Nexperia products by customer.

**No offer to sell or license** — Nothing in this document may be interpreted or construed as an offer to sell products that is open for acceptance or the grant, conveyance or implication of any license under any copyrights, patents or other industrial or intellectual property rights.

**Export control** — This document as well as the item(s) described herein may be subject to export control regulations. Export might require a prior authorization from competent authorities.

Non-automotive qualified products — Unless this data sheet expressly states that this specific Nexperia product is automotive qualified, the product is not suitable for automotive use. It is neither qualified nor tested in accordance with automotive testing or application requirements. Nexperia accepts no liability for inclusion and/or use of non-automotive qualified products in automotive equipment or applications.

In the event that customer uses the product for design-in and use in automotive applications to automotive specifications and standards, customer (a) shall use the product without Nexperia's warranty of the product for such automotive applications, use and specifications, and (b) whenever

PSMN7R0-30YLC

customer uses the product for automotive applications beyond Nexperia' specifications such use shall be solely at customer's own risk, and (c) customer fully indemnifies Nexperia for any liability, damages or failed product claims resulting from customer design and use of the product for automotive applications beyond Nexperia's standard warranty and Nexperia' product specifications.

**Translations** — A non-English (translated) version of a document is for reference only. The English version shall prevail in case of any discrepancy between the translated and English versions.

#### **Trademarks**

Notice: All referenced brands, product names, service names and trademarks are the property of their respective owners.

### 10. Contact information

For more information, please visit: <a href="http://www.nexperia.com">http://www.nexperia.com</a>

For sales office addresses, please send an email to: <a href="mailto:salesaddresses@nexperia.com">salesaddresses@nexperia.com</a>

# PSMN7R0-30YLC

## N-channel 30 V 7.1 mΩ logic level MOSFET in LFPAK using NextPower technology

## 11. Contents

1	Product profile
1.1	General description
1.2	Features and benefits
1.3	Applications
1.4	Quick reference data
2	Pinning information
3	Ordering information
4	Limiting values
5	Thermal characteristics
6	Characteristics
7	Package outline
8	Revision history12
9	Legal information13
9.1	Data sheet status
9.2	Definitions13
9.3	Disclaimers
9.4	Trademarks14
10	Contact information14