


Low cost & small footprint alternative for single output applications

AHC Dividers with Oscillator

74AHC1G42xx is a xx-stage AHC divider with oscillator. Each flip-flop stage divides the frequency by two, consequently the 74AHC1G42xx counts to 2^{xx} . 74AHC1G42xx dividers exist in five variants: 8, 10, 12, 14 and 15-stage.


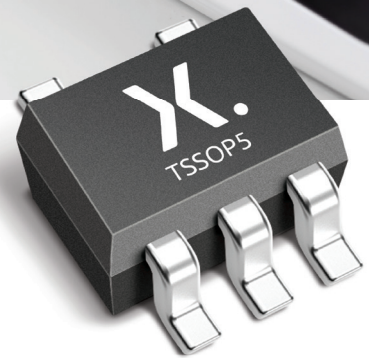


Standard logic dividers/counters (74HC4020, 74HC4040 and 74HC4060) are general purpose solutions with multiple outputs. In many applications, only a single frequency is required so only one output is used. The unused outputs result in many divider solutions being oversized.

To reduce the footprint of divider solutions, the 74AHC1G42xx range of dedicated single output Mini Logic dividers has been created. 74AHC1G42xx small footprint divider solutions offer specific 2^{xx} frequency division where $xx = 01$ to 16. The footprint is reduced substantially, from 59.4mm^2 to 4.4mm^2 (from SO16 to TSSOP5).

Benefits

- › Wide supply voltage range from 2.0 V to 5.5V
- › CMOS overvoltage tolerant (OVT) inputs support mixed-mode voltage operation
- › Integrated oscillator for driving external resonator
- › ESD – HBM exceeding 2000 V (ANSI/ESDA/JEDEC JS-001, Class 2)
- › Low power dissipation
- › Automotive qualified (-Q100) options

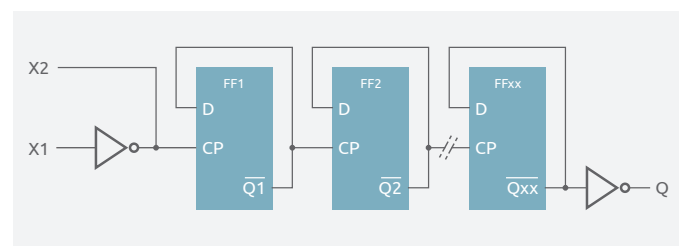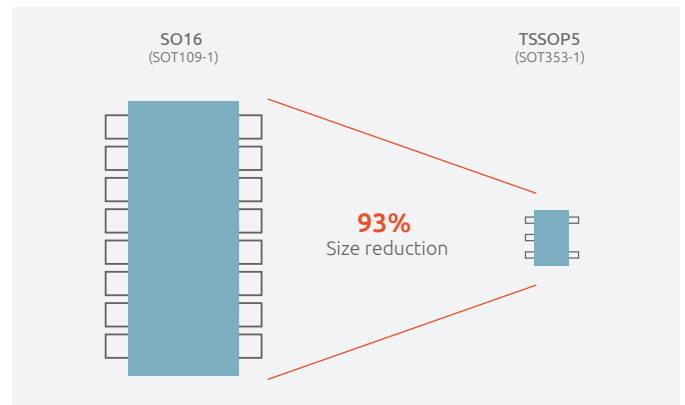

nexperia

EFFICIENCY WINS.

Applications

- › Low-power operated applications
- › Space-constrained applications
- › Frequency division
- › Clock management






Key markets

- › Industrial
- › Consumer
- › Computing
- › Automotive

Parametrics


V _{CC} Range	Output Drive	Prop Delay (t _{PD})	Temperature Range	Static Current (I _{CC})
2.0 – 5.5 V	+/-8 mA	24 ns	-40 °C to +125 °C	0.1 µA (typ.)

Available types

Type		
74AHC1G4208		8-stage divider and oscillator
74AHC1G4210		10-stage divider and oscillator
74AHC1G4212		12-stage divider and oscillator
74AHC1G4214		14-stage divider and oscillator
74AHC1G4215		15-stage divider and oscillator

 Types carrying this symbol are also available as Automotive-qualified variants (-Q100 logic portfolio)

Package

Suffix	Package version	Package name	Dimensions (L x W x H, pitch - in mm)	
GW	SOT353-1	TSSOP5	2.1 x 2.0 x 1.0, 0.65	

Types releasable upon request


74AHC1G4201, 74AHC1G4202, 74AHC1G4203, 74AHC1G4204, 74AHC1G4205, 74AHC1G4206, 74AHC1G4207, 74AHC1G4209, 74AHC1G4211, 74AHC1G4213, 74AHC1G4216.

Current function can be offered with master reset in equivalent 6-pin packages.


Typical crystal oscillator circuit

Used for generating clock pulses required for synchronization purposes

Forward transconductance as function of supply voltage (T_{amb} = 25°C)

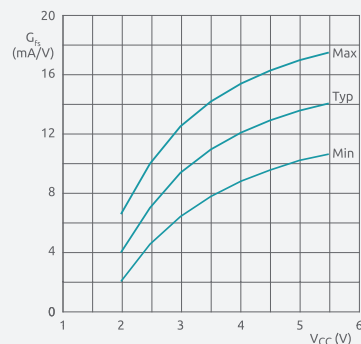

External component connection for a crystal oscillator

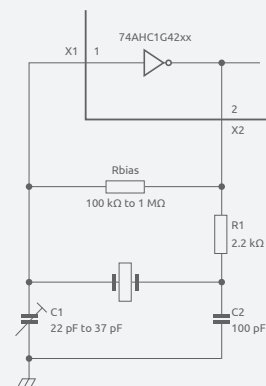

© 2019 Nexperia B.V.

All rights reserved. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice. No liability will be accepted by the publisher for any consequence of its use. Publication thereof does not convey nor imply any license under patent- or other industrial or intellectual property rights.

nexperia.com

Date of release:

July 2019

Printed:

In the Netherlands

